
THIS DRAWING IS UNPUBLISHED DIFFUSION RESTREINTE | RELEASED FOR PUBLICATION LIBRE A LA DIFFUSION
© COPYRIGHT- TE CONNECTIVITY ALL RIGHTS RESERVED

REVISIONS

	REV	DESCRIPTION /MODIFICATIONS	DATE	DWN	APVD
	1	NEW DRAWING	06MAY2020		

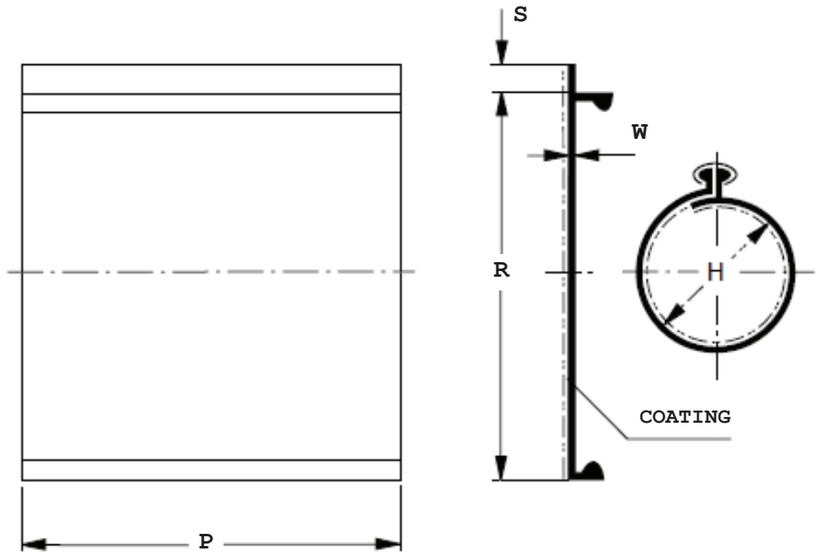

NOTES

1. DIMENSIONS IN mm. a = AS SUPPLIED, b = AFTER FREE RECOVERY
2. COATING CODE: /239. MIN THICKNESS: 0.6 mm
3. STANDARD LENGTHS P (mm): 250, 500, 750, 1000, 1200 and 1500. OTHER CUT LENGTHS AVAILABLE UNDER REQUEST
4. MAXIMUM LONGITUDINAL CHANGE AFTER FREE RECOVERY: -5%/+10%

STANDARD CUT LENGTH TOLERANCES:
- ± 5 mm (P ≤ 250)
- ± 10 mm (P > 250)
- ± 15 mm (P>500)

5. STANDARD PRINTING: LOGO, CRSM, PRODUCT SIZE, BATCH NUMBER

PRODUCT SIZE	APPLICATION RANGE		H		R		S	W	
	MIN	MAX	a min	b max	a min	b max	a min	a min	b min
CRSM 34/10	11	27	35	9	110	35	15	0.3	2.4
CRSM 53/13	17	43	54	15	175	49	20	0.3	2.0
CRSM 84/20	24	68	85	21	270	69	32	0.3	2.0
CRSM 107/29	32	86	108	27	340	90	32	0.3	2.0
CRSM 143/36	39	115	144	28	455	119	32	0.3	1.8
CRSM 198/55	60	160	203	50	640	172	32	0.3	2.1
CRSM 250/98	105	200	257	91	810	314	32	0.3	1.7



THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

MATERIAL -

FINISH -

DWM BHR
CHK ANM
APVD: ANM
PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -

TE Connectivity

NAME
CRSM HEAT SHRINK WRAPAROUND SLEEVE

SIZE FORMAT	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	-	EPD-202-32014-01	-

CUSTOMER DRAWING | SCALE NTS | SHEET 1 | REV 1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

175977-2 2-520263-2 2005330-1 2310537-1 U5254-000005-030PA 1393454-9 HT-CT-50M-1-OUT-0 TE50BR39J 1903112-2 3631B101LL 1-962915-1 170376-2 282680-1 292206-2 CPF0402B37K4E1 SBCHE154R7K T4133012081-000 1897725-2 354022KFT RH73H2A40MKTN 2380312-2 3-1447221-5 SBCHE64R7K 917688-1 HSHC4508K2J MPT100C18RF SMV1W220KJT 2-521104-2 2098557-4 ROX05SJ18R