Heat Shrink Tubing

RoHS Compliant



Description

The heat shrinkable protection tube, which provides insulation protection for wire, cable and wire terminals. It has high temperature shrinkage, soft flame retardant, insulation corrosion functions and so on. It is widely used in the insulation protection for all kinds of wire, welding point and inductance and the rust and corrosion for metal pipes.

Specifications

Material	: Polyethylene
Colour	: Black and Transparent
Working Temperature	: -55°C to +125°C
Longitudinal Shrinkage	: ≦5%
Shrink Temperature	: Start at 70°C and shrink totally at 135°C
Shrinking Ratio	: 2:1
Flammability	: VW-1

Diagram

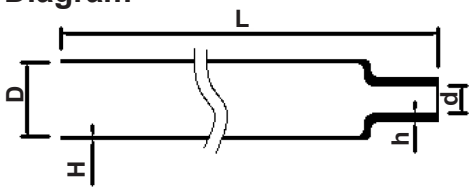

Part Number	As Supplied		After Recovery		Colour	Cutting Length (L)
	I.D. (D)	Average Wall Thickness (H)	I.D. (d)	Wall Thickness (h)		
MC001765	41mm ±0.7mm	0.55mm ±0.10	≤20mm	1mm ±0.15mm	Black	152.4mm
MC001768					Transparent	1200mm

Part Number Table

Description	Part Number
Heat Shrink Tubing, Black, PK of 5	MC001765
Heat Shrink Tubing, Transparent, PK of 5	MC001768

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell Limited 2016.