Emergency Stop Switch
3NC



RoHS Compliant

Specifications

Mechanical Life	: >0.25 million operations
Electrical Life	: >0.1 million operations
Rated Insulation Voltage	: 600V
Rated Thermal Current	: 10A
Insulation Resistance	: 100MΩ
Dielectric Strength	: 2,500V AC, 1 minute
Panel Thickness	: 0.8mm to 6mm
Degree of protection	: IP65
Storage Temperature	: -45°C to +85°C
Operating Temperature	: -25°C to +55°C

Contact Ratings


Rated Insulation Voltage		600V			
Rated Thermal Current		10A			
Operating Voltage		24V	120V	240V	380V
AC	Resistive Load (AC-12)	10A	10A	6A	2A
50/60 Hz	Inductive Load (AC-15)	10A	6A	3A	1.9A
DC	Resistive Load (DC-12)	8A	2.2A	1.1A	-
	Inductive Load (DC-13)	4A	1.1A	0.55A	-

Contact Block Mounting Position


Contact		Operator Position		
		Free	Push	-
1	NC	●		
2	NC	●		
3	NC	●		

●=On (closed contact)
Blank=Off (open contact)

Screw Type Emergency Stop Switches

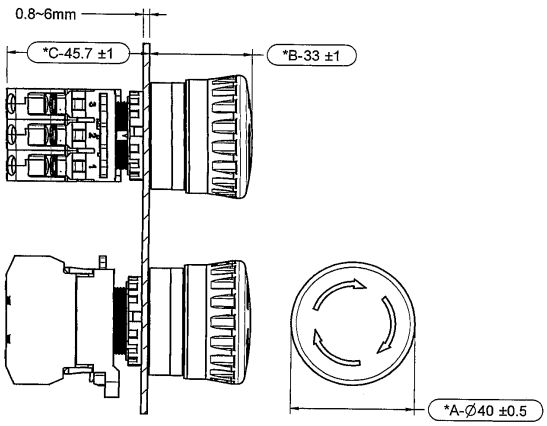

Hole Dia

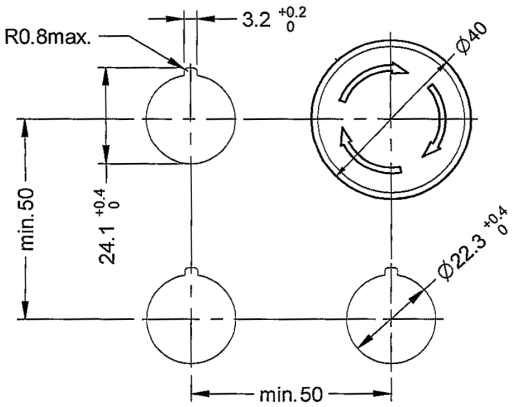

Dimensions : Millimetres

Emergency Stop Switch
3NC

Part Number Explanation

MCA20B	-	V	4	E	03	R
Type		Emergency Stop	Mushroom	Standard	3NC	Red

Part Number Table

Description	Part Number
Emergency Stop Switches, 40mm, 3NC, Red, Without Lamp	MCA20B-V4E03R

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell Limited 2016.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

multicomp:

CMS-DF-1825 MCMR50V335M4X7 MC0603N100J201CT MC34589 MC34747 MCSR08X3300FTL MCWF12R7150BTL SMAJ160A-13-F MCLPR50V478M30X25 MC0603B393K500CT MCMR08X2000FTL MCSDC0603-560KU MP006964 MP005415 SPC19989 2213R-24G MC-SVT1-S06-G MC0402WGF499JTCE MC0603N100F500CT MC36427 MCMET 800MA 250V MCMF0W4FF8202A50 MCMR06X1004FTL MCWR08X39R0FTL CFS-TF-1818 MCSDRH73B-681MHF CF06332T/4/10 MCAL0410A1-471KU MP006937 MUR1540