


STRAIGHT BULKHEAD JACK PANEL SEAL
REAR MOUNT CLAMP TYPE - CAB 2.6/50+75


R141.324.000
Series : **BNC**

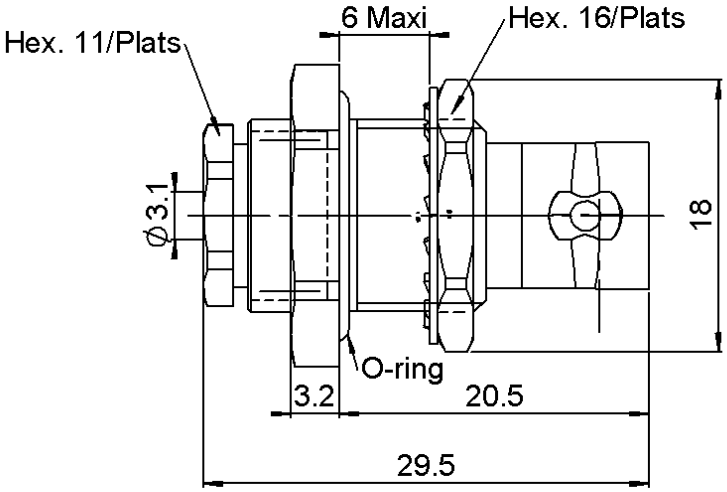

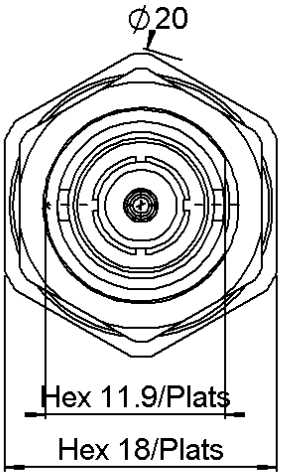


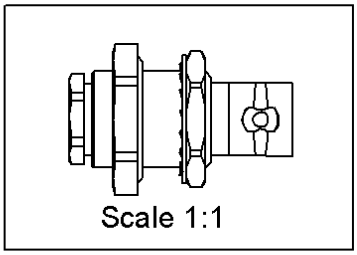

PANEL CUT OUT



	mm	
	Maxi	mini
A	12.8	12.7
B	12.1	12



All dimensions are in mm.

COMPONENTS	MATERIALS	PLATING (µm)
BODY	**BRASS**	**NICKEL 2**
CENTER CONTACT	**BERYLLIUM COPPER**	**GOLD 0.5 OVER NICKEL 2**
OUTER CONTACT	-	-
INSULATOR	**PTFE**	
GASKET	**SILICONE RUBBER**	
OTHERS PARTS	**BRASS**	**NICKEL 2**
-	-	-
-	-	-

Issue : 0742 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIALL®

STRAIGHT BULKHEAD JACK PANEL SEAL

REAR MOUNT CLAMP TYPE - CAB 2.6/50+75

R141.324.000

Series : **BNC**

PACKAGING

Standard	Unit	Other
100	**'W' option**	**Contact us**

ELECTRICAL CHARACTERISTICS

Impedance		**50**	Ω
Frequency		**0-4**	GHz
VSWR	**AD +**	**0,0000**	x F(GHz) Maxi
Insertion loss		**0.115**	√F(GHz) dB Maxi
RF leakage	**- (**	**-**	- F(GHz)) dB Maxi
Voltage rating		**335**	Veff Maxi
Dielectric withstanding voltage		**1500**	Veff mini
Insulation resistance		**5000**	MΩ mini

MECHANICAL CHARACTERISTICS

Center contact retention		
Axial force – Mating end	**27**	N mini
Axial force – Opposite end	**27**	N mini
Torque	**N/A**	N.cm mini
Recommended torque		
Mating	**N/A**	N.cm
Panel nut	**370**	N.cm
Clamp nut	**450**	N.cm
A/F clamp nut	**0,0000**	mm
Mating life	**500**	Cycles mini
Weight	**24,7610**	g

ENVIRONMENTAL

Operating temperature	**-65/+165**	° C
Hermetic seal	**NA**	Atm.cm3/s
Panel leakage	**N/A**	

SPECIFICATION

CABLE ASSEMBLY

Stripping	a	b	c	d	e	f
mm	4,00	2,00	9,00	0,00	5,00	0,00

Assembly instruction : **Clamp 01**

Recommended cable(s)
RG 316
RG 188
RG 187
RG 179
KX 22A

Characteristics indicated on this data sheet are those that can be achieved with the highest performance cable. Intrinsic limitations of the cable may diminish the performance of the assembly

Cable retention

- pull off	**110**	N mini
- torque	**-**	N.cm

TOOLING

Part Number	Description	Hexagon
.	.	.

OTHER CHARACTERISTICS

-

Issue : 0742 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIALL®

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Radiall:

R141557000W R284C0351054 R125403001 R141407000W R142703000 R191303000 R284C0351015 R191329000 R284C0351050 R124510000W R125078000W R125326000 R112186000 R114165000W EPXBE13P1SB R284C0351026 R316553000 R114554000W R929104/C290004-20CM R180300007W R191405000 R223424000 R284C0351003 R112553000 R142076161 R143012000 R161325000W EPXBE28SA R180160007 R929101/C290001-10CM