
rotronic

Datenblatt - Fiche technique - Data sheet


11.04.5553

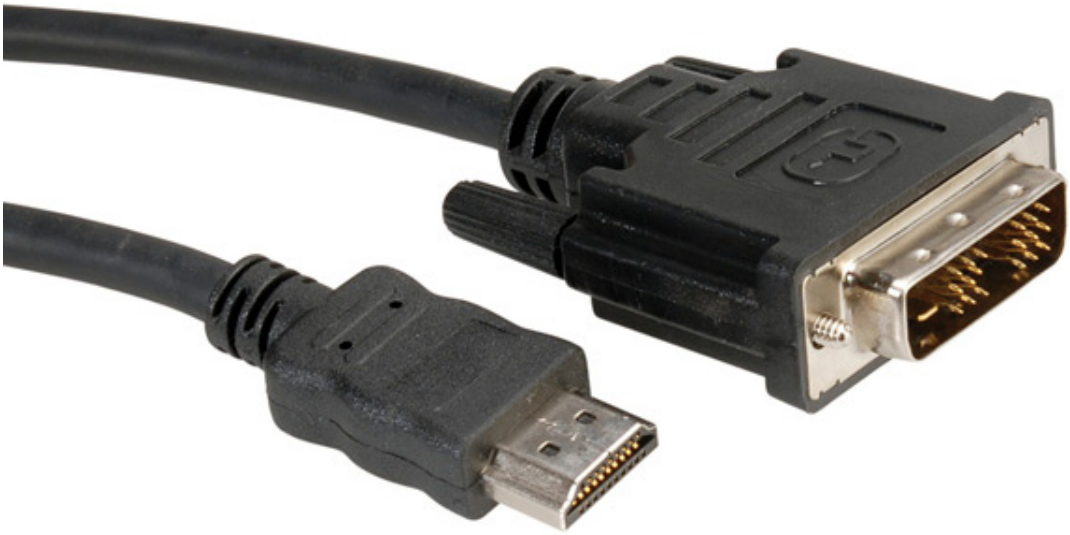


ROLINE Kabel DVI (18+1) ST – HDMI ST, 10 m

ROLINE Câble de raccordement pour écran DVI (18+1) M /HDMI M, 10 m

ROLINE DVI Cable, DVI (18+1) M – HDMI M, 10 m

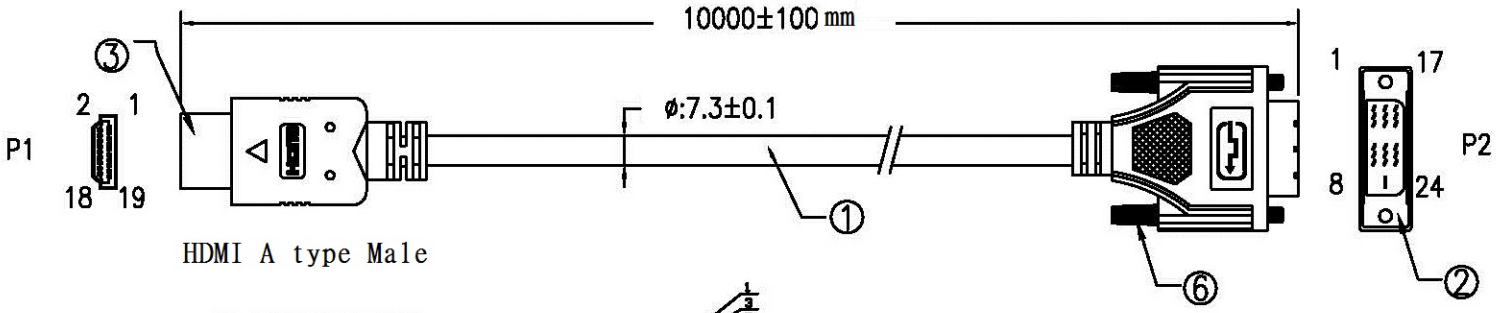

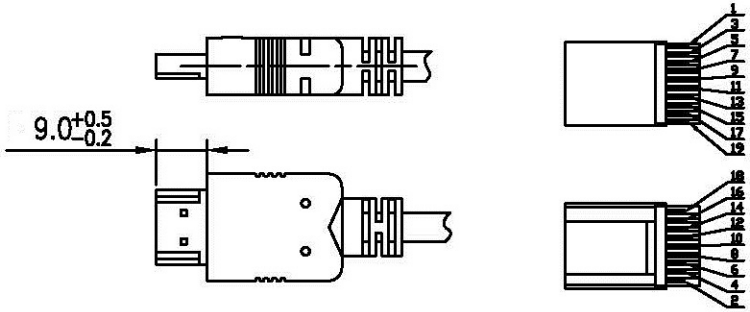

PINOUT:

P1 HDMI		P2 DVI-D(18P+1)
RED CORE 2		3 GND
RED CORE 1		2 WHITE
RED CORE 3		1 WHITE/RED
GREEN CORE 5		11 GND
GREEN CORE 4		10 WHITE
GREEN CORE 6		9 WHITE/GREEN
BLUE CORE 8		19 GND
BLUE CORE 7		18 WHITE
BLUE CORE 9		17 WHITE/BLUE
BLACK CORE 11		22 GND
BLACK CORE 10		23 WHITE
BLACK CORE 12		24 WHITE/BLACK
15		6 ORANGE
16		7 YELLOW
18		14 RED
17		15 PURPLE
19		16 WHITE
SHELL	DRAIN	SHELL

NOTES:

1) INSULATION RESISTANCE: 10M ohm (MIN) 300V/DC
2) CONTACT RESISTANCE: 5 ohm (MAX)
3) 360° copper foil and welding

4	OUTER JACKET PVC 45P BLACK
3	HDMI A TYPE PLUG TERMINAL PLATED GOLD 1U" SHELL PLATED NI
2	DVI 18P+1 M, BLACK, SOLDER TYPE
1	UL20276(28#1P+A+D)*4+28#1P+28#5C+A+B(128% AL-MG)+D OD:7.3MM BLACK 10M

11.04.5553

ROLINE DVI Cable, DVI - HDMI, M/M, 10m, black

rotronic

DIMENSIONS	TOLERANCE
0.00 TO 30.00mm	±0.10mm
30.01 TO 80.00mm	±0.13mm
80.01 TO 150.00mm	±0.15mm
150.01mm	±0.20mm
MATERIAL	
FINISH	

CHKD. | CONF.
DR. san | APPD.
SCALE | SHEET 1/1 | UNIT MM | SIZE A4 | REV. A

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

roline:

11.02.9027-10 11.02.9104 11.04.5500-20 21.13.1157-1 11.01.5618-50 11.02.8971-50 11.02.8877-10
11.04.5253-20 12.99.1089 11.02.8945-100 11.04.5568-10 11.04.5732-10 11.04.5870 11.44.5731-10
12.03.3240-10 12.04.1088 17.03.1101 11.02.8978-50 11.02.9082-10 11.04.5220-2 12.03.3130-20
12.04.1077 14.01.3455-5 11.02.9011-10 11.04.5635 11.04.5943-10 11.44.5780-10 12.03.3225-10
12.03.2991 17.02.1547-1