
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 19
© COPYRIGHT 2011 - ALL RIGHTS RESERVED.


LOC	DIST
GE	00


REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	E1	REVISED PER ECO-11-005030	26APR2011	RK	HMR

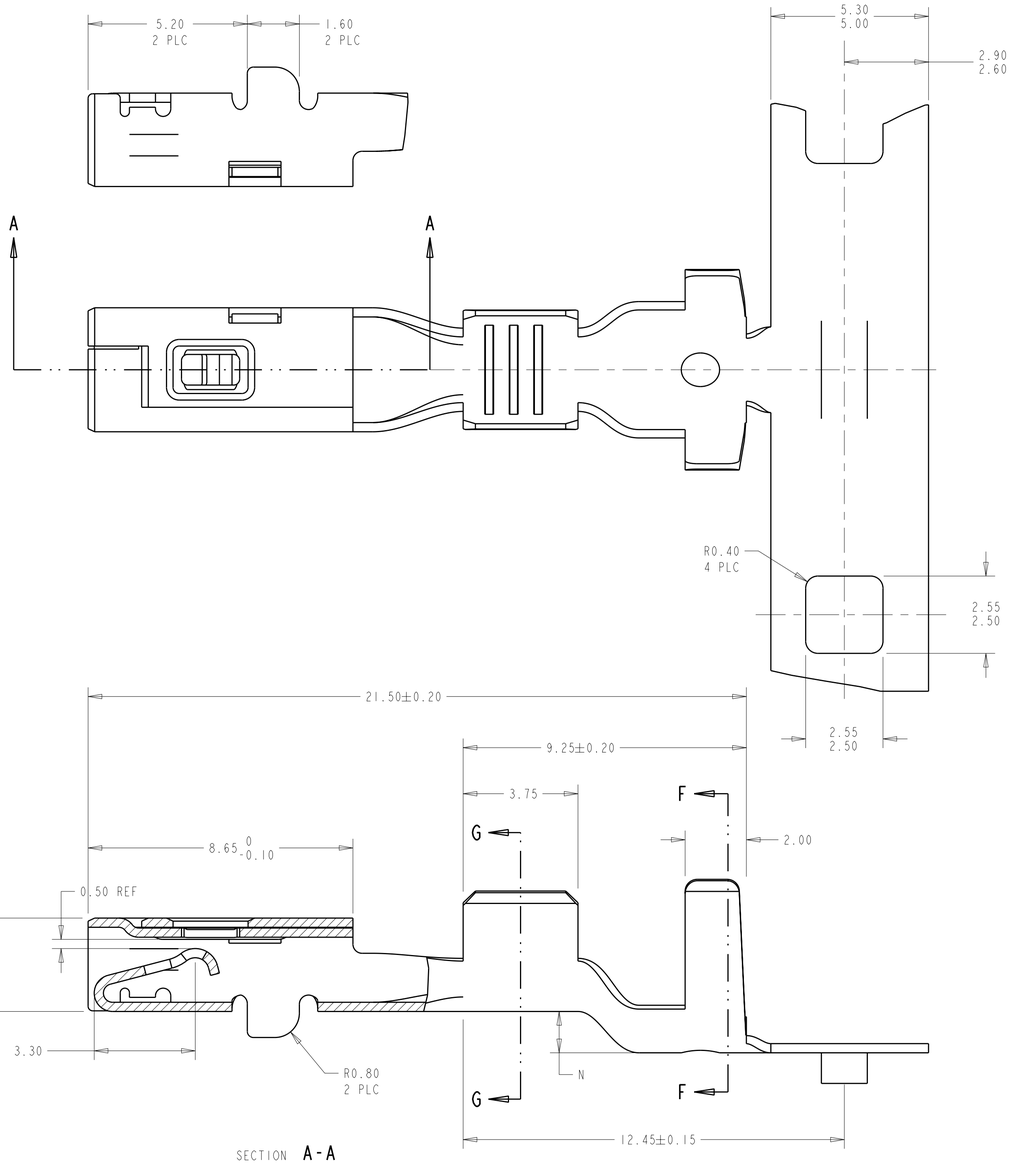


SECTION A-A



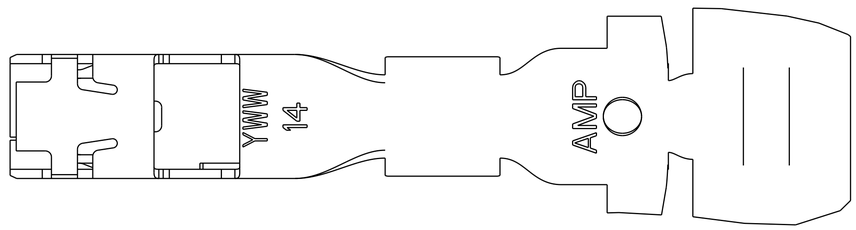




SECTION F-F




SECTION G-G

1. MATERIAL: 0.30 THICK COPPER ALLOY, PREPLATED WITH 0.0008 MINIMUM THICK REFLOW TIN OR BRIGHT TIN (ELV COMPLIANT).

   ALTERNATE MATERIAL: 0.30 THICK COPPER ALLOY, PREPLATED WITH 0.0008 MINIMUM THICK BRIGHT TIN (ELV COMPLIANT).

2. 

STANDARD REELING DIRECTION

3. 

REVERSE REELING DIRECTION

4. QUALIFICATION OF THE CRIMP APPLICATION TOOLING SHALL BE CONTROLLED BY THE REQUIREMENTS ESTABLISHED UNDER USCAR 21.

5. LOOSE END SPLICING TO BE USED.

3	1326032-6 REELED FOR AMP APPLICATORS							12 AWG	1-1326032-2
	1326032-5 REELED FOR AMP APPLICATORS							14 AWG	1-1326032-1
	1326032-4 REELED FOR AMP APPLICATORS							16 AWG	1-1326032-0
	1326032-3 REELED FOR AMP APPLICATORS							18 AWG	1326032-9
	1326032-2 REELED FOR AMP APPLICATORS							20 AWG	1326032-8
	1326032-1 REELED FOR AMP APPLICATORS							22 AWG	1326032-7
2	1.35	6.8	4.30	6.09	4.7	2.70	5.25	12 AWG	1326032-6
	1.35	6.5	4.30	5.62	3.9	1.70	3.88	14 AWG	1326032-5
	1.10	5.6	3.80	4.54	3.9	1.70	3.88	16 AWG	1326032-4
	1.10	5.6	3.80	4.54	3.3	1.30	2.76	18 AWG	1326032-3
	0.90	5.0	3.40	4.11	3.3	1.30	2.76	20 AWG	1326032-2
	0.90	5.0	3.40	4.11	2.5	0.90	2.11	22 AWG	1326032-1
REELING	N	L	ØK	J	H	ØF	E	WIRE SIZE	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±0.3
2 PLC ±0.10
3 PLC ±-
4 PLC ±-
ANGLES ±5°

MATERIAL 1
FINISH 1

DWN	D. STRAUSSER	28APR99
CHK	D. BROWN	28APR99
APVD	D. BROWN	28APR99

TE Connectivity

NAME: 2.8mm RECEPTACLE, SEALED

PRODUCT SPEC: SAE/USCAR-2 8/97
APPLICATION SPEC: 114-13013
WEIGHT: -

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-1326032	-

CUSTOMER DRAWING

SCALE	SHEET	OF	REV
10:1	1	1	E1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

175977-2 2834055-1 1-794222-0 1-962915-1 2005330-1 3-1393225-0 936348-1 CRGCQ2010J3K3 SBCHE154R7K 1969656-1 2377783-2 MPT100C18RF RH73H2A40MKTN ROX05SJ18R TE50BR39J 1743455-2 2-292161-3 2310537-1 SMW73R0JT 1903112-2 650075-000 CPF0402B37K4E1 U5254-000005-030PA 1393431-1 141991-2 3631B101LL SBCHE64R7K 2380312-2 3430B2F51RTDF 917696-1