
THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.


Rating	20A 125VAC 10A 250VAC 16A 125VAC 3/4HP 10A 277VAC 3/4HP 21A 14VDC
Configured For	250VAC 277VAC
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	−20°~85°
Switch Function	3P SPST ON-OFF LAMP Dependent
Lamp Type	Neon 250VAC 277VAC w/resistor


Mounting Hole




Thickness(mm)	X(mm)	Y(mm)
0.75~1.25	21.2+0.1	$36.6^{+0.2}_{-0}$
1.25~2.0		$36.8^{+0.2}_{-0}$
2.0~3.0		$37.0^{+0.2}_{-0}$


Circuit Diagram




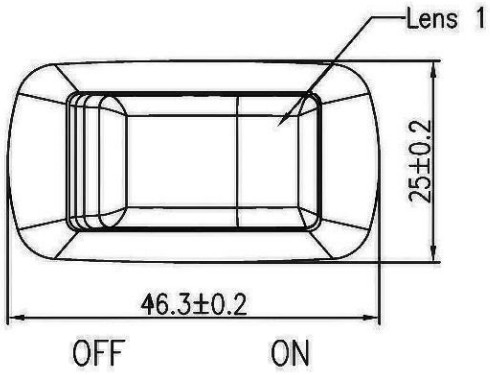


MATERIAL:
Frame: Nylon 66, Black
Actuator: Nylon 66 with 33%GF, Black
Lens: PC, Red
Lamp: Neon, Red
Water proof and dust proof to fit IP−56

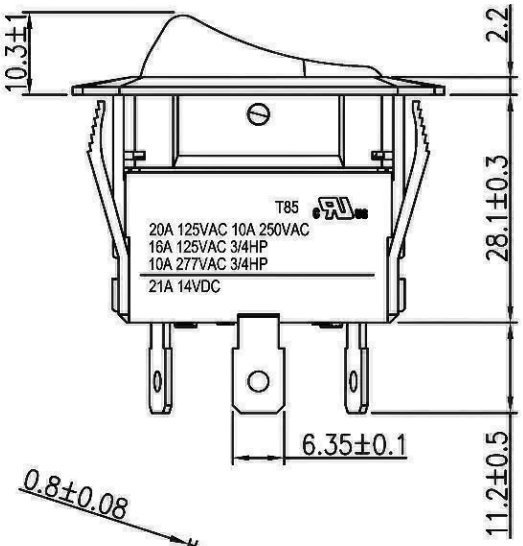

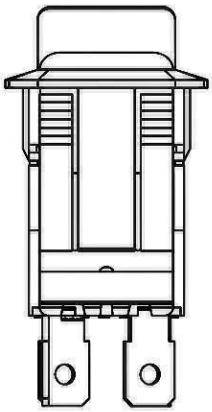

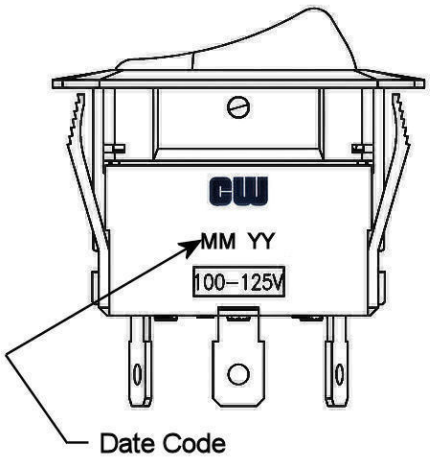

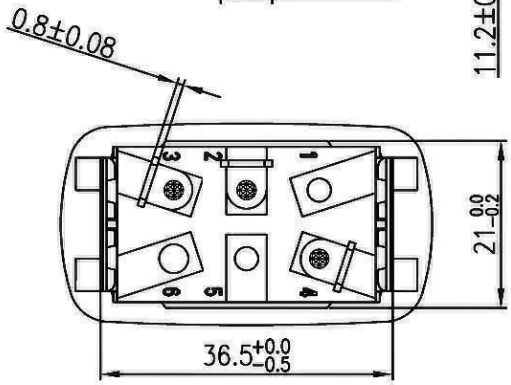

RoHS Compliant

3	Added Configured for to rating, Dependent to function & Lamp Type. 1/23/12.
2	20A 125VAC 10A 250VAC was 20A 125VAC 10A 25VAC in Rating. 1/24/11.

CW INDUSTRIES
Southampton, Pa. 18966
Tel 215.355.7080/www.cwind.com

Date Drawn: 1/24/11	Rev. 3	Unit: mm	Checked By: G. Guld

Title: ROCKER SWITCH	CW P/N: GRB260A401BBRN2

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

CW Industries:

CWN-370-40-0000 GPBS-800L GRS-2012A-2000 CWN-322-10-0021 CWR-280-37-0000 GRS-2012-2000 GRS-4011-0036 GPB553A2L01BW GPB556A05BR GPB556A05BU GRS-4023A-1300 CWN-572-20-0000 CWR-130-40-0203 CWR-280-09-0000 GF-326-0000 GRS-2011B-2000 CWN-SR-14 GRS-2013A-3010 GRS-4021C-0000 CWR-210-26-0000 CWR-227-10-0203 GRB260K101BBNN GRS-2013A-3001 GRS-4021-0001 CWR-217-60-0203 CWR-220-20-0203 CWR-227-40-0000 CWR-281-09-0000 GRB292D301BBRG1 M83503/7-06