
Datasheet

ASK 1EN/LD, KDKS 1EN/LD and KDKS 1PE/LD

Indicating Fuse Terminal Blocks

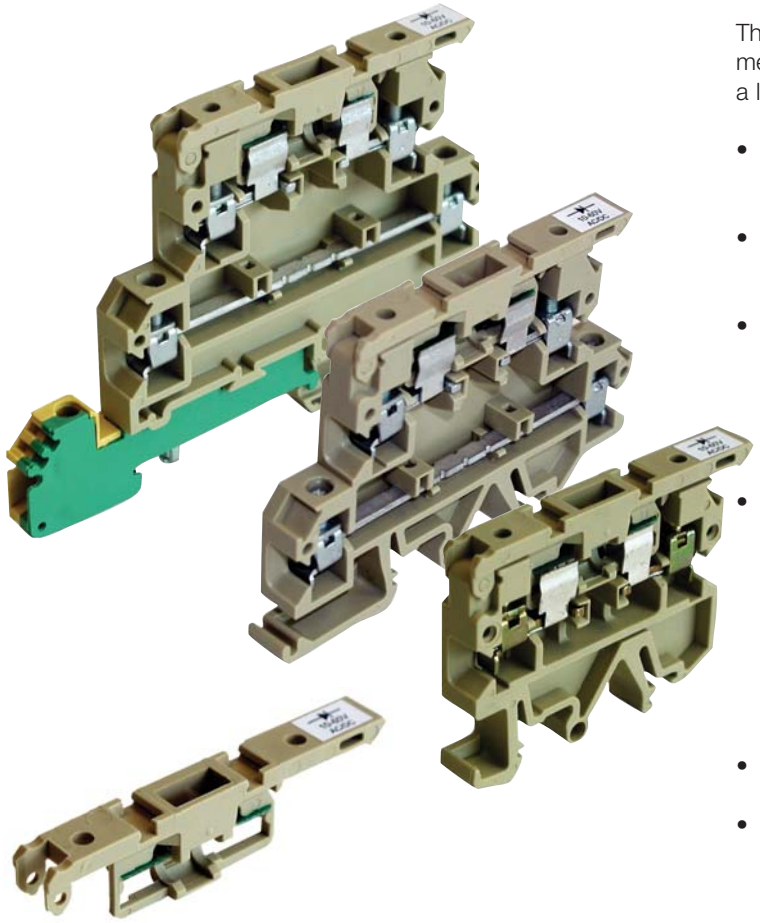

The well known ASK 1EN/LD fuse block and its family members (KDKS 1EN/LD and KDKS 1PE/LD) have undergone a little face lift.

- BFI (Blown Fuse Indicator) circuit using new high efficiency, high visibility SMT (Surface Mount Technology) LED
- BFI circuit built in to the lever; opening the lever disconnects the BFI circuit
- Wide voltage range BFI circuit
  - Reduction of inventory
  - Close to 40 part numbers are replaced by only 16
  - UC (Universal AC/DC Current) hinge sensitive half wave rectified
- Extra low leakage current for operator safety

10-60V unit:		100-250V unit:	
- 10Vac/dc	90µA	- 100Vac/dc	152µA
- 12Vac/dc	111µA	- 115Vac/dc	172µA
- 15Vac/dc	141µA	- 220Vac/dc	337µA
- 24Vac/dc	240µA	- 230Vac/dc	352µA
- 28Vac/dc	495µA	- 250Vac/dc	383µA
- 60Vac/dc	630µA		

- Labeling of voltage range and polarity on the lever
- For each type, 4 available options
  - 10-60Vac/dc hinge negative or positive
  - 100-250Vac/dc hinge negative or positive

Canada
W Interconnections Canada Inc.
10 Spy Court
Markham, Ontario L3R 5H6
Telephone: (800) 268-4080
Facsimile: (905) 475-2798
Email: info1@weidmuller.ca
Website: www.weidmuller.ca


United States
W Interconnections, Inc.
821 Southlake Blvd.
Richmond, Virginia 23236
Telephone: (800) 849-9343
Facsimile: (804) 379-2593
Email: info@weidmuller.com
Website: www.weidmuller.com

Mexico
W Interconnections, S.A. de C.V.
Ave Ingenieros Civiles #204
Conjunto Industrial Chachapa
72990 Puebla, Pue. Mexico
Telephone: (222) 286 82 47
Facsimile: (222) 286 62 42
Website: www.weidmuller.com.mx


Weidmüller

ASK 1EN/LD, KDKS 1EN/LD and KDKS 1PE/LD


ASK 1EN/LD
with or without LED



KDKS 1EN/LD
with or without LED



KDKS 1PE/LD
with or without LED



		ASK 1EN/LD	KDKS 1EN/LD	KDKS 1PE/LD
Width/Length/Height with TS35x7.5	mm	8 x 58 x 44	8 x 73.5 x 55.7	8 x 91 x 65
Max. current / max. cond. cross-section	A/mm²	6.3 / 4	6.3 / 4	6.3 / 4
Max. clamping range	mm²	0.13 ... 4	0.13 ... 4	0.13 ... 4

Technical data

Rated data		IEC	UL	CSA	IEC	UL	CSA	IEC	UL	CSA
Rated voltage for adjacent terminal	V	500	300	300	500	300	300	500	300	300
Rated current (top level/bottom level)	A	6.3/-	10 /-	10/-	6.3/32	10/20	10*/25	6.3/32	10/20	10*/25
Rated cross-section	mm²	4	AWG 26…12	AWG 26…12	4	AWG 26…12	AWG 26…12	4	AWG 26…12	AWG 26…12
Rated impulse voltage / Pollution severity	kV/-	6 / 3			6 / 3			6 / 3		
Plug gauge IEC 60-947-1 / flammability class acc. UL 94		A4 / V2			A4 / V2			A4 / V2		
Approvals										
Note		*Up to 15 Amp rating based on 0 Ohm inline resistance dummy slug. Derating required based on inline resistance of fuse used. Check with fuse manufactureer for details.								

Clampable conductors (H05V/H07V)		Rated connection	Rated connection	Rated connection
Solid / stranded	mm²	0.5…4 / 1.5...4	0.5…4 / 1.5...4	0.5…4 / 1.5...4
Flexible / flexible w. wire end ferrule	mm²	0.5…4 / 0.5…4	0.5…4 / 0.5…4	0.5…4 / 0.5…4
Tightening torque range (clamping screw)	Nm	0.5…1.0 (M 3)	0.5…1.0 (M 3)	0.5…1.0 (M 3)
Stripping length / blade size	mm / -	9 / 3.5 x 0.6	9 / 3.5 x 0.6	9 / 3.5 x 0.6
Information		The rated cross-section is reduced to max. 2.5 mm² when using cross-connection bridges.	The rated cross-section is reduced to max. 2.5 mm² when using cross-connection bridges.	The rated cross-section is reduced to max. 2.5 mm² when using cross-connection bridges.

Order data

Version	Type	Qty.	Order No.	Type	Qty.	Order No.	Type	Qty.	Order No.
No LED Indication	ASK1EN	100	0474560000	KDKS1EN	50	9503350000	KDKS1PE	50	9528110000
10-60V ac/dc Blown Fuse Indication Hinge Negative	ASK1EN/SMT10-60VUC BFI H-	100	0222760001	KDKS1EN/SMT10-60VUC BFI H-	50	9802720001	KDKS1PE/SMT10-60VUC BFI H-	50	9158330001
10-60V ac/dc Blown Fuse Indication Hinge Positive	ASK1EN/SMT10-60VUC BFI H+	100	9123140001	KDKS1EN/SMT10-60VUC BFI H+	50	9908510001	KDKS1PE/SMT10-60VUC BFI H+	50	9158340001
100-250V ac/dc Blown Fuse Indication Hinge Negative	ASK1EN/SMT100-250VUC BFI H-	100	0225560001	KDKS1EN/SMT100-250VUC BFI H-	50	9802760001	KDKS1PE/SMT100-250VUC BFI H-	50	9158350001
100-250V ac/dc Blown Fuse Indication Hinge Positive	ASK1EN/SMT100-250VUC BFI H+	100	9118290001	KDKS1EN/SMT100-250VUC BFI H+	50	9915820001	KDKS1PE/SMT100-250VUC BFI H+	50	9915150001

Levers (Beige only)	Type	Qty.	Order No.	Type	Qty.	Order No.	Type	Qty.	Order No.
No LED Indication	LEVER	50	2012920000	LEVER	50	2012920000	LEVER	50	2012920000
10-60V ac/dc Blown Fuse Indication Hinge Negative	LEVER SMT10-60VUC BFI H-	50	9908660001	LEVER SMT10-60VUC BFI H-	50	9908660001	LEVER SMT10-60VUC BFI H-	50	9908660001
10-60V ac/dc Blown Fuse Indication Hinge Positive	LEVER SMT10-60VUC BFI 1H+	50	9908670001	LEVER SMT10-60VUC BFI 1H+	50	9908670001	LEVER SMT10-60VUC BFI 1H+	50	9908670001
100-250V ac/dc Blown Fuse Indication Hinge Negative	LEVER SMT100-250VUC BFI H-	50	9908680001	LEVER SMT100-250VUC BFI H-	50	9908680001	LEVER SMT100-250VUC BFI H-	50	9908680001
100-250V ac/dc Blown Fuse Indication Hinge Positive	LEVER SMT100-250VUC BFI H+	50	9908690001	LEVER SMT100-250VUC BFI H+	50	9908690001	LEVER SMT100-250VUC BFI H+	50	9908690001

Accessories

Cross-connection	Type	Qty.	Order No.	Type	Qty.	Order No.	Type	Qty.	Order No.
2-pole	QB 2 WI RA8 IS	50	0461100000	QB 2 WI RA8 IS	50	0461100000	QB 2 WI RA8 IS	50	0461100000
3-pole	QB 3 WI RA8 IS	50	0461200000	QB 3 WI RA8 IS	50	0461200000	QB 3 WI RA8 IS	50	0461200000
4-pole	QB 4 WI RA8 IS	50	0461300000	QB 4 WI RA8 IS	50	0461300000	QB 4 WI RA8 IS	50	0461300000
58-pole	QB 58 Straight	50	0545400000	QB 58 Straight	50	0545400000	QB 58 Straight	50	0545400000
58-pole	QB 58 Angled	50	0545300000	QB 58 Angled	50	0545300000	QB 58 Angled	50	0545300000
58-pole	IP 58 Insulation Profile	50	0546000000	IP 58 Insulation Profile	50	0546000000	IP 58 Insulation Profile	50	0546000000

End plate / partition (behind last terminal)	Type	Width [mm]	Qty.	Order No.	Type	Width [mm]	Qty.	Order No.	Type	Width [mm]	Qty.	Order No.
	AP ASK1	[1.5]	20	0380360000	AP KDKS1	[1.5]	20	9503330000	AP KDKS1	[1.5]	20	9503330000

Marking systems	Type	Order No.	Type	Order No.	Type	Order No.
	DEK 5/8MC	1856740000	DEK 5/8MC	1856740000	DEK 5/8MC	1856740000

Miscellaneous	Type	Qty.	Order No.	Type	Qty.	Order No.	Type	Qty.	Order No.
SBL Contact sleeve/slug	KOHU ASK1	100	0446100000	KOHU ASK1	100	0446100000	KOHU ASK1	100	0446100000
Group marking carrier for ganging 2 or more poles together	SchS2	1m	0337400000	SchS2	1m	0337400000	SchS2	1m	0337400000

Subject to technical changes · Printed in Canada · 99990349 · 06/2006

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

WeidmÃ¼ller:

1950200000 8690200000 1124150000 1760040000 1890260000 8951460000 1121990000 1127570000 1607520000 1906650000 2642470000 9037380000 9456650000 1609820000 1784180000 1786450000 1804580000 1013450000 2535780000 1622940000 1221360000 1608570000 1608830000 1649300000 024892 SAKS3 1031470000 1779950000 1818090500 0303620000 1289470000