



RoHS Compliant


ZONE	E C N . N O .	DESCRIPTION	DRAWING	DATE
A		INITIAL	林生财	2023.11.24







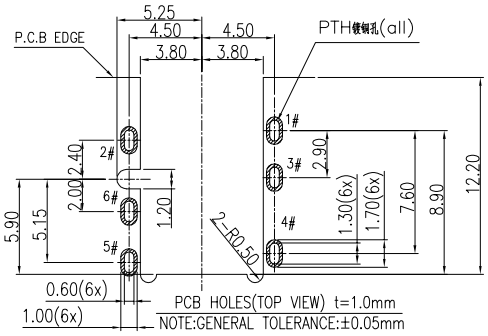





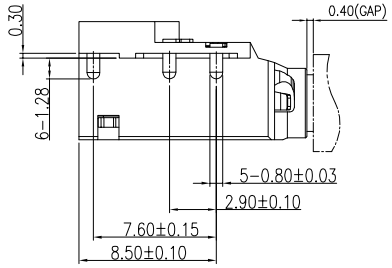





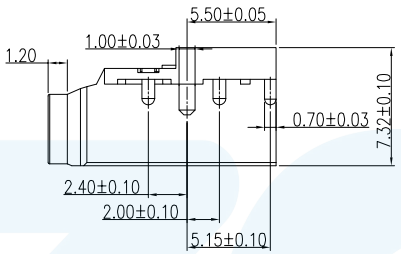









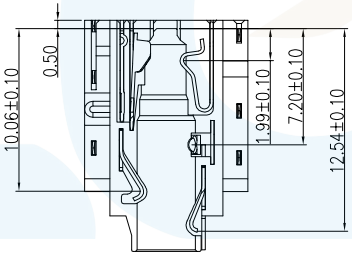


NOTES:
1. MATERIAL: SEE "TABLE 1";
2. FINISH: SEE "TABLE 1";
3. ELECTRICAL:
   3.1. VOLTAGE RATING: 12 VAC RMS;
   3.2. CURRENT RATING: 0.5 AMP;
   3.3. CONTACT RESISTANCE: 50mΩ Max.(Initial),
   CHANGE 10mΩ Max.(After Life test);
   3.4. INSULATION RESISTANCE: 1000 MΩ Min., 500VDC.(Initial),
   100 MΩ Min., 500VDC.(After Humidity test);
   3.5. WITHSTAND VOLTAGE: 500 VAC RMS 50(60)Hz, 1 minute;
4. MECHANICAL:
   4.1. MATING FORCE: 2.0Kgf MAX.;
   4.2. UNMATING FORCE: 0.5Kgf MIN.;
   4.3. OPERATING LIFE: 5000 CYCLES MIN.;
5. ENVIRONMENTAL:
   5.1. OPERATION: -30°C~+80°C.
   5.2 Salt Spray: 48Hours.

PLUG SPEC	SCHEMATIC	AFTER INSERT SCHEMATIC	TESTING PLUG







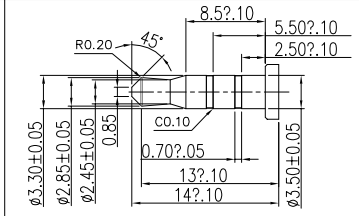


TABLE 1:

NO.	PART NAME	QTY	MATERIAL	DESCRIPTION	REMARK
⑧	Contact_5 5	1	C5210	CONTACT AREA: Au1u"MIN SOLDER AREA: Au1u"MIN 50u" OVER ALL	T=0.20mm
⑦	Contact_6 6	1	C5210		T=0.20mm
⑥	Contact_4 4	1	C5210		T=0.20mm
⑤	Contact_3 3	1	C5210		T=0.20mm
④	Contact_2 2	1	C5210		T=0.20mm
③	Contact_1 1	1	C5210		T=0.20mm
②	Separator	1	PA10T	BLACK,UL94V-0	
①	Housing	1	PA10T	BLACK,UL94V-0	

LZG INDUSTRIAL CO. LTD


DRAWING:	林生财	DATE:	2023.11.24	SCALE	1:1
CHECK:	李宏鑫	DATE:	2023.11.24	MATERIAL	*
APPROVAL:	杨进宝	DATE:	2023.11.24	DWG. NO.	
DRAWING NO.	ZB23029-06FBAP-A			SHEET	1/2


PART NAME	ø3.50mm AUDIO JACK
PART NO.	ZB23029-06FBAP-A


TOLERANCE UNLESS OTHERWISE SPECIFIED: 0.0±0.25, 0.00±0.15, 0.000±0.05; 0.°±2°, 0.0°±1°, 0.00°±0.5°; UNIT: mm


RoHS Compliant


ZONE	E C N . N O .	DESCRIPTION	DRAWING	DATE
A		INITIAL	林生财	2023.11.24

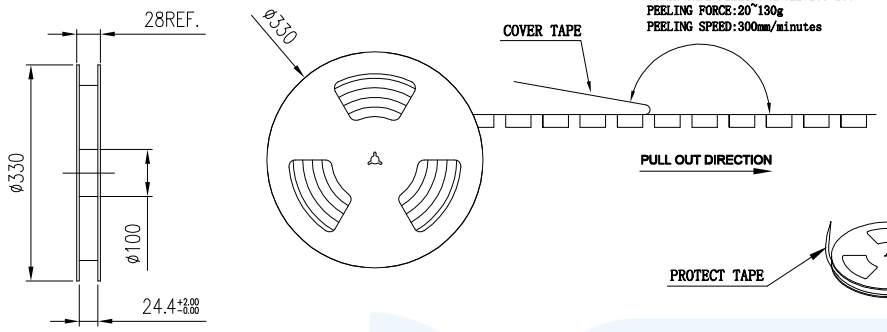

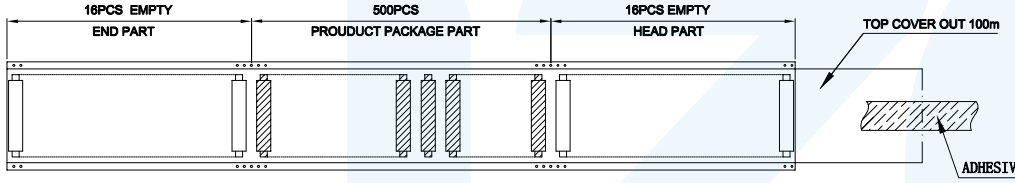

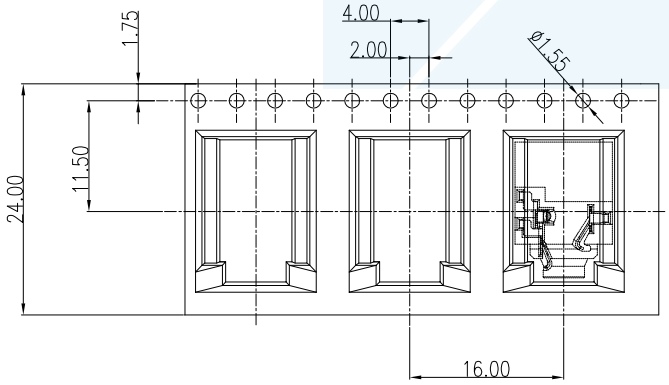

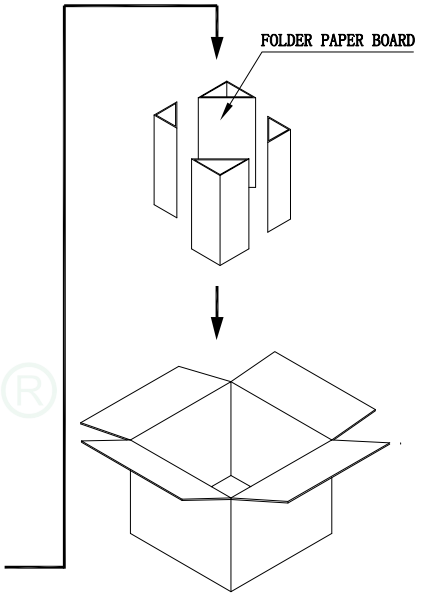



CARTON SIZE

1 CARTON = 10 REEL = 5000 PRODUCT

LZG INDUSTRIAL CO. LTD

PART NAME	ø3.50mm AUDIO JACK	TOLERANCE UNLESS OTHERWISE SPECIFIED:	0.0±0.25 0.00±0.15 0.000±0.05	0.°±2° 0.0°±1° 0.00°±0.5°	UNIT: mm	DRAWING:	林生财	DATE:	2023.11.24	SCALE	1:1
PART NO.	ZB23029-06FBAP-A					CHECK:	李宏鑫	DATE:	2023.11.24	MATERIAL	*
						APPROVAL:	杨进宝	DATE:	2023.11.24	DWG. NO.	
						DRAWING NO.	ZB23029-06FBAP-A			SHEET	2/2