
REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	04/20/09	A.D.M.

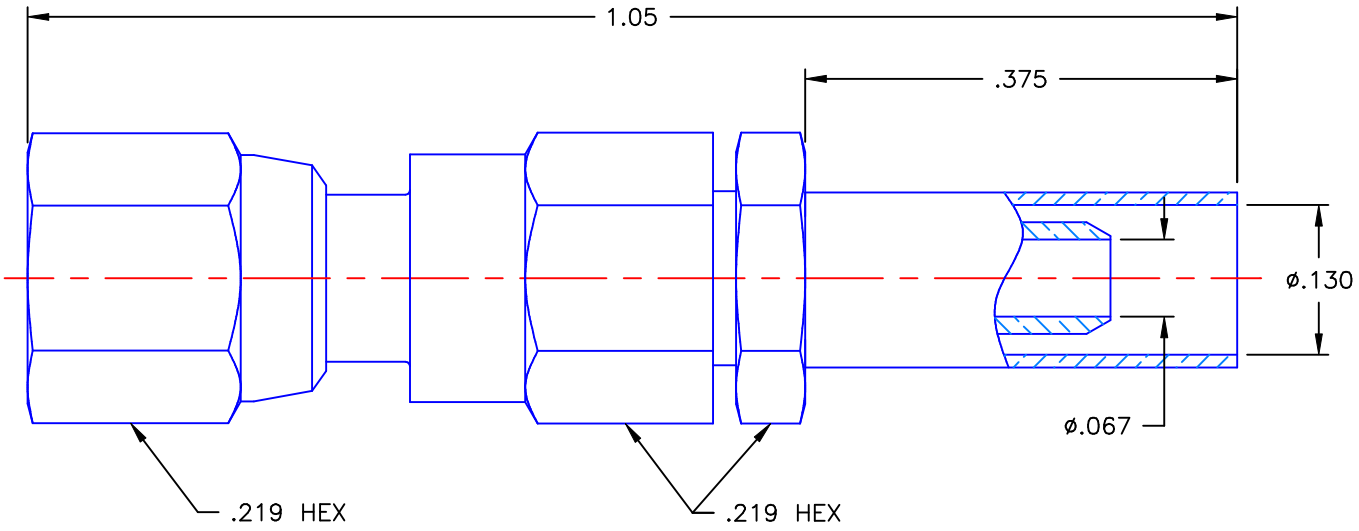

NOTES:

MATERIALS:

1. INSULATORS = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
2. CONTACT = BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TD04.
3. CRIMP SLEEVE = SEAMLESS LOWLEAD BRASS TUBE, ALLOY 330, SOFT ANNEAL TEMPER, .025/.060 GRAIN SIZE OR SEAMLESS COPPER TUBE PER ASTM B75, TYPE C12000, TEMPER: LIGHT ANNEAL 050 EXCEPT YIELD STRENGTH.
4. ALL OTHER METAL PARTS = BRASS PER ASTM B16, ALLOY C36000, TEMPER H02.

FINISHES:

1. CONTACT = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER .00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ-N-290.
2. ALL OTHER METAL PARTS = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 0, GRADE C, OVER .00010 TO .00020 COPPER STRIKE PER MIL-C-14550.

Property of Radiall Incorporated
This document cannot be reproduced or communicated to a third party without prior written permission of RADIALL Incorporated.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON	DWN: A.D.M.	DATE 04/20/09	AEP a RADIALL company — APPLIED ENGINEERING PRODUCTS, 104 John W. Murphy Dr., New Haven, CT 06513
DECIMAL / ANGLE	CHKD: D.N.	DATE 04/20/09	SMC STRAIGHT FEMALE PLUG CRIMP TYPE FOR RG-316 DS & SIMILIAR CABLES
	APVD: J.M.	DATE 04/20/09	
REFERENCE: ORIGINATOR: A.D.M. DATE: 04/20/09	MATERIALS & FINISHES: SEE NOTES	SIZE A / FSCM NO. 19505 / DWG. NO. 1002-1571-019 / REV A	
		SCALE 6:1	THIRD ANGLE PROJECTION / SHEET 1 OF 1

1002-1571-019

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Radiall:

R114554000W R125326000 R284C0351015 R142076161 R284C0351003 R191303000 R929101/C290001-10CM R929104/C290004-20CM EPXBE13P1SB R180300007W R191329000 R191405000 R284C0351050 R125078000W R125403001 R161325000W R180160007 R284C0351026 R316553000 EPXBE28SA R112186000 R112553000 R141557000W R223424000 R114165000W R124510000W R141407000W R142703000 R143012000 R284C0351054