



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -
© COPYRIGHT - BY - ALL RIGHTS RESERVED.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A2	ECR-19-007522	13MAY2019	V.T	E.J
	A3	ECR-20-004141	18MAR2020	V.T	E.J
	B	ECR-20-007431	15JUN2020	V.T	E.J
	C	ECR-20-015257	01JUN2021	V.T	Z.Z

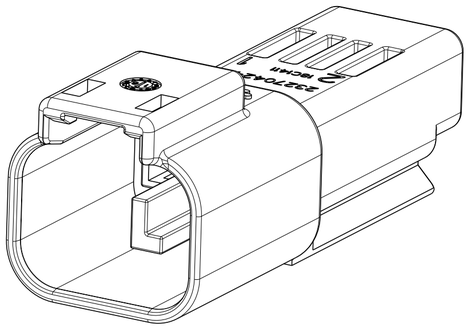


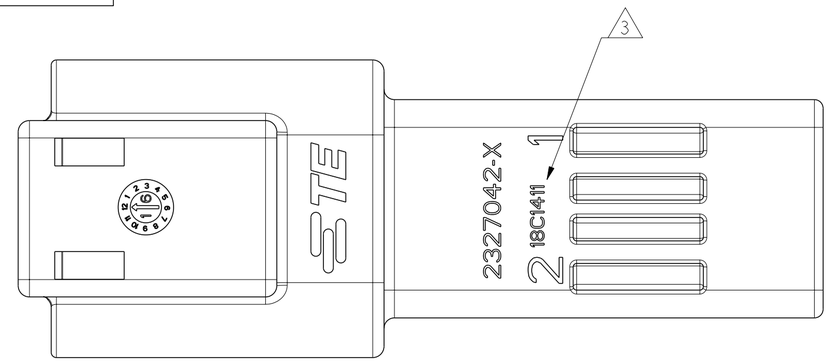

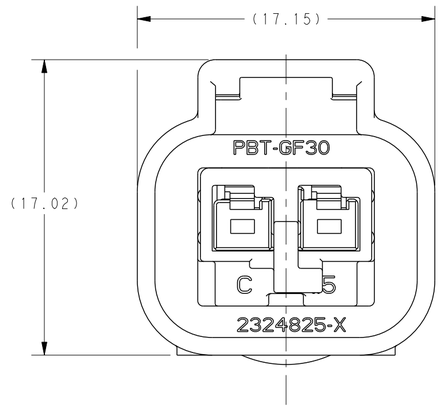

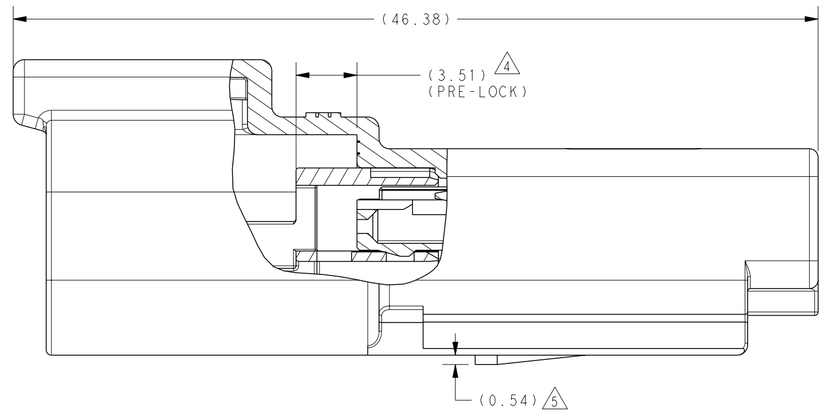

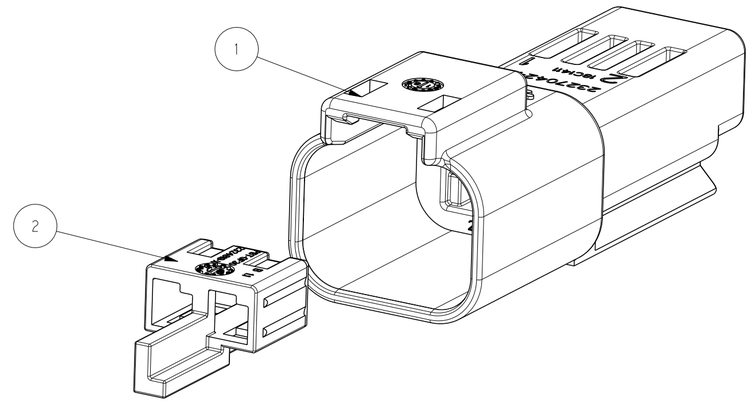

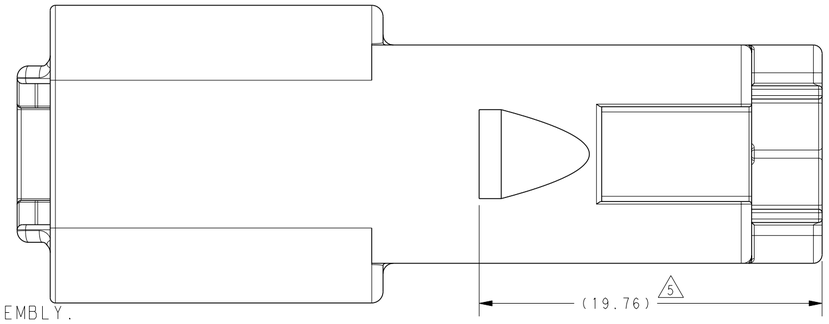

NOTES:

1. RECEPTACLE 2327042-X MATES WITH 2324808-X PLUG (X=1, 2, 3 FOR RELEVANT CODE).
   RECEPTACLE 2-2327042-X MATES WITH 2-2324808-X PLUG (X=1, 2, 3 FOR RELEVANT CODE).

2. MATERIAL: HOUSING: PBT GF30,SEE TABLE FOR COLOR
   TPA: PBT GF30,SEE TABLE FOR COLOR


3. DATE CODE: INDENTIFIES THE YEAR, MONTH, DAY AND HOUR OF ASSEMBLY.
   YEAR: FIRST AND SECOND DIGITS(17=2017)
   MONTH: THIRD DIGIT , EXCLUDING I , A=JAN, B=FEB, C=MARCH...(K=OCTOBER)
   DAY: FOURTH AND FIFTH DIGITS(14=14th DAY)
   HOUR: SIXTH AND SEVENTH DIGITS(11=11AM)

4. PULL TPA TO PRE-LOCK BEFORE TERMINAL INSERTION IN CASE OF TPA BEING HIT TO END-LOCK POSITION.


5. REFER TO DRAWING DT04-DOVETAIL FOR CLIP INTERFACE DIMENSIONS, RECOMMEND MOUNTING CLIP PN LIST:.
   METAL VERSION PN:1027-003-1200,1027-004-1200,1027-005-1200,1027-008-1200,1027-013-1200;
   PLASTIC VERSION PN:1011-026-0205,1011-030-0205,1011-310-0205,2355806-1.

6. APPLICABLE TERMINAL PART NUMBERS AND WIRE SIZE:


TERMINAL PN	TERMINAL PLATING	APPLICATION	WIRE SIZE (MM2)	INSULATION WIRES(MM)	SWS P/N	BLIND PLUG P/N
2141114-1	TIN	GENERAL (USCAR-2 V2)	0.35	Ø1.10~Ø1.40	963142-2	963143-1
2141114-3	SILVER	HIGH VIBRATION (USCAR-2 V3)				
2141116-1	TIN	GENERAL (USCAR-2 V2)	0.5~0.75	Ø1.40~Ø1.90	963142-1	963143-1
2141116-3	SILVER	HIGH VIBRATION (USCAR-2 V3)				
2177610-1	TIN	GENERAL (USCAR-2 V2)	1.0~1.5	Ø1.90~Ø2.40	963142-1	963143-1
2177610-3	SILVER	HIGH VIBRATION (USCAR-2 V3)				



CODING A
PN:2327042-1 (V0)
2-2327042-1 (HB)



CODING B
PN:2327042-2 (V0)
2-2327042-2 (HB)



CODING C
PN:2327042-3 (V0)
2-2327042-3 (HB)

QTY. REQUEST PER ASSY						COLOR	MATERIAL	DESCRIPTION	ITEM NO
1			1			NATURAL	PBT-GF30	TPA,CODE C	2
	1			1		GREEN	PBT-GF30	TPA,CODE B	
		1			1	YELLOW	PBT-GF30	TPA,CODE A	
1	1	1				GRAY	PBT-GF30	HOUSING	1
			1	1	1	BLACK	PBT-GF30		
5.7	5.7	5.7	6.3	6.3	6.3	WEIGHT OF EACH ASSY NO. (g)			
C	C	C	C	C	C	REVISION OF EACH ASSY NO.			
2-2327042-3 (HB)	2-2327042-2 (HB)	2-2327042-1 (HB)	2327042-3 (V0)	2327042-2 (V0)	2327042-1 (V0)	TE ASSEMBLY PN			

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±0.25
2 PLC ±0.15
3 PLC ±-
4 PLC ±-
ANGLES ±-

MATERIAL -
FINISH -

DWN C.WAN 17JAN2018
CHK E.JIANG 26FEB2018
APVD I.YIN 02MAR2018
PRODUCT SPEC 108-32189
APPLICATION SPEC 114-32258
WEIGHT -

TE Connectivity

NAME SUPERSEAL PRO 2POS, RECP. ASSEMBLY MCON1.2, CB TERMINAL

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-2327042	

CUSTOMER DRAWING | SCALE 2:1 | SHEET 1 OF 1 | REV C

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

2380312-2 917696-1 SBCHE154R7K 141991-2 936348-1 1903112-2 3430B2F51RTDF 2834055-1 SBCHE64R7K 175977-2 2-292161-3 2377783-2 CRGCQ2010J3K3 1393431-1 1969656-1 RH73H2A40MKTN U5254-000005-030PA 1-794222-0 1743455-2 650075-000 CPF0402B37K4E1 MPT100C18RF ROX05SJ18R SMW73R0JT 2005330-1 2310537-1 3-1393225-0 3631B101LL TE50BR39J 1-962915-1