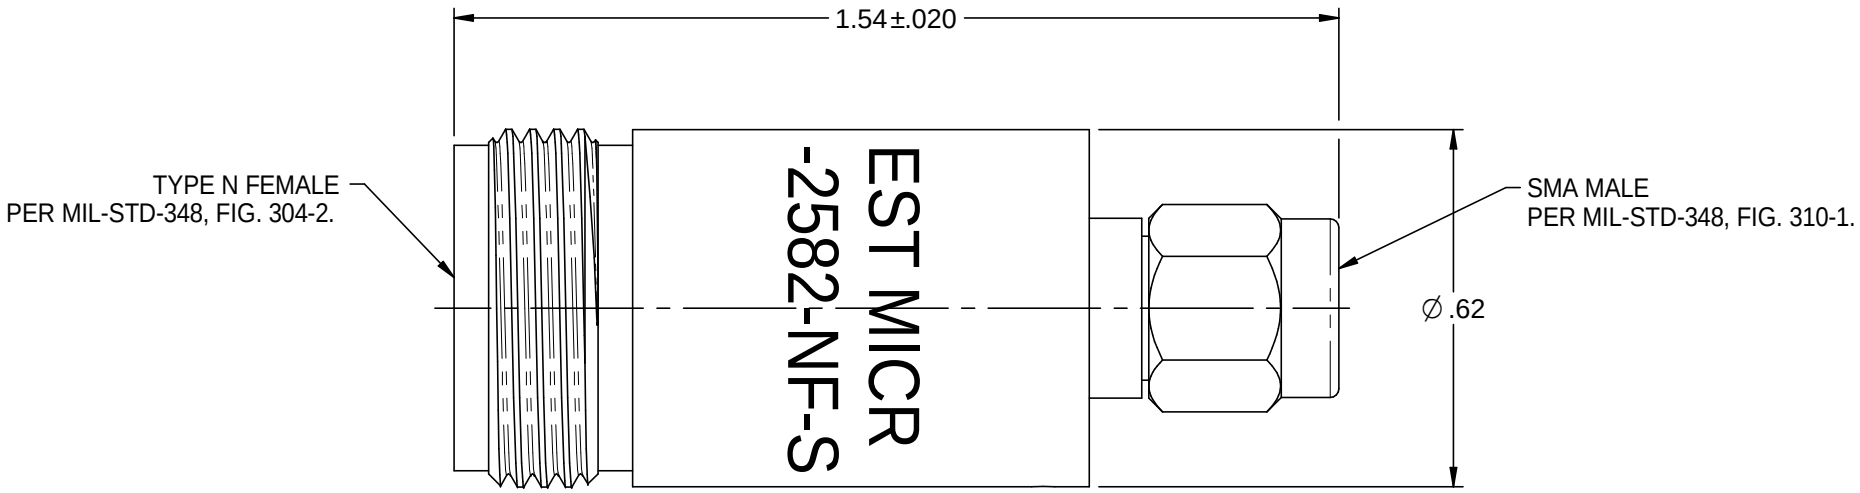


NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS:
   1.1 HOUSING & NUT: PASSIVATED STAINLESS STEEL
   1.2 CENTER CONTACT: GOLD BERYLLIUM COPPER
   1.3 DIELECTRIC: PTFE FLUOROCARBON

2. ELECTRICAL SPECIFICATIONS:
   2.1 FREQUENCY RANGE: DC TO 18.0 GHz
   2.2 VSWR (MAX):
      DC TO 4.0 GHz: 1.04:1
      4.0 TO 8.0 GHz: 1.07:1
      8.0 TO 18.0 GHz: 1.12:1
   2.3 IMPEDANCE: 50 OHMS

EMERSON Network Power
Connectivity Solutions

This PROPRIETARY Document is property of Emerson Network Power Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not traced or copied without permission and is returnable upon demand.

INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.

3RD ANGLE PROJECTION

RoHS ☑ 2002/95/EC

UNLESS OTHERWISE SPECIFIED
UNITS: INCH
.XX ±.02
.XXX ±.005
ANGLES ±2°

Midwest Microwave

Title: SMA PLUG TO TYPE N JACK ADAPTER

Model No. ADT-2582-NF-SMM-02

Size	DO NOT SCALE DRAWING	Date:	Sheet 1 of 1
A		7/23/2013	

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Cinch:

415-0030-MM150 ATT-0263-04-SMA-02 CN0967C10A20P6-040 415-0043-024 8-141 DD2466134
131-3701-306 135-3402-001 C0909A18-11PN-106 142-0403-011 21-14-M5.0 415-0031-024 M24308/4-5F
111-0102-001 137-0203-001 142-9003-201 147-0701-832 25-7050 M49142/03-0008 108-0913-001 12-141
415-0071-MM500 PL30-29 24-9912P DEUH-9P M49142/05-0008 145-0701-821 CJ70-7 PL375-9
147-0701-241