THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT 2010 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST
DW	—


REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	REVISED PER ECN-22-168605	17AUG2022	AK	SZ


NOTE:
1. MATERIAL:
   HOUSING: THERMOPLASTIC (SEE TABLE), UL 94V-0.
   COLOR:(SEE TABLE).
   CONTACT: PHOSPHOR BRONZE,THICKNESS=0.25mm.
   SHELL: PHOSPHOR BRONZE THICKNESS: 0.30mm.
   BACK SHELL: STAINLESS STEEL, THICKNESS: 0.30mm.


2. FINISH:
   CONTACTS:GOLD FLASH OVER
   30u" MIN. PALLADIUM-NICKEL PLATED ON CONTACT AREA,
   100u" MIN. MATTE-TIN ON SOLDER TAILS,
   50u" MIN. NICKEL UNDERPLATED ALL OVER.
   SHELL:100u" MIN. BRIGHT TIN OVER 50u" MIN. NICKEL UNDERPLATED.


△3 WAVE SOLDER CAPABLE TO 265°C PER TE SPEC 109-202, CONDITION B,
△4 REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B,

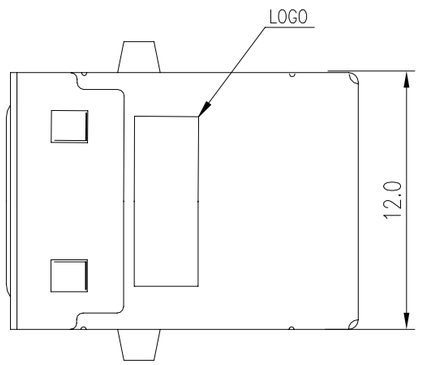


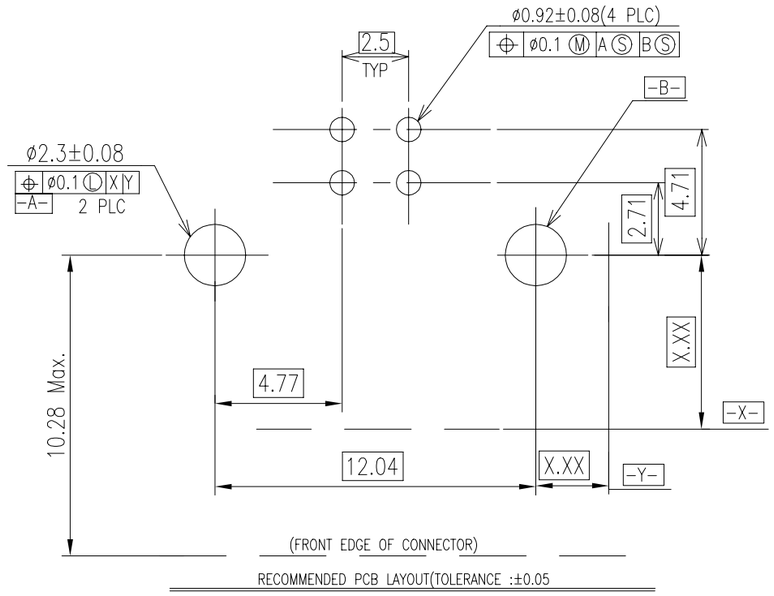

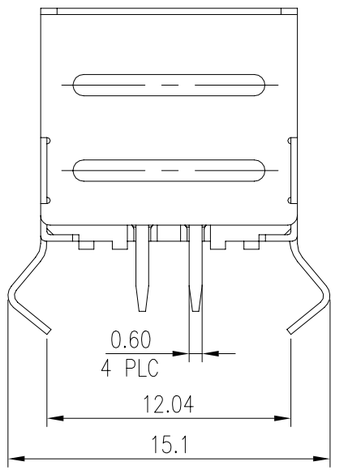

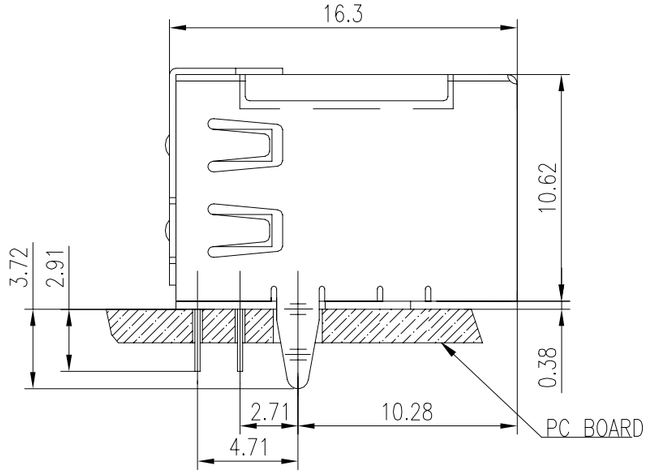

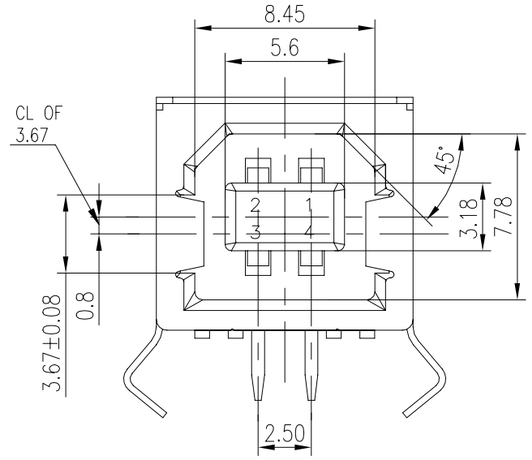



△4	HICH TEMP, THERMOPLASTIC	NATURAL/WHITE	4-1734376-8
△3	THERMOPLASTIC	WHITE	4-1734376-7
SOLDERING PROCESS	HOUSING MATERIAL	COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± 0.38
1 PLC	± 0.25
2 PLC	± 0.13
3 PLC	± 0.05
4 PLC	± –
ANGLES	± –

MATERIAL: SEE NOTE
FINISH: SEE NOTE

DWN	O. HU 01JUN2005
CHK	S. HOU 01JUN2005
APVD	W.J. KE 01JUN2005
PRODUCT SPEC	108-57538
APPLICATION SPEC	—
WEIGHT	3.89 GRAMS

TE Connectivity

NAME: UBS CONN, SERIES B, A4P, R/A, THRU HOLE, W/ BACK SHELL

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1734376	—


CUSTOMER DRAWING | SCALE — | SHEET 1 OF 2 | REV B


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT 2010 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST
DW	—

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEEL 1.			

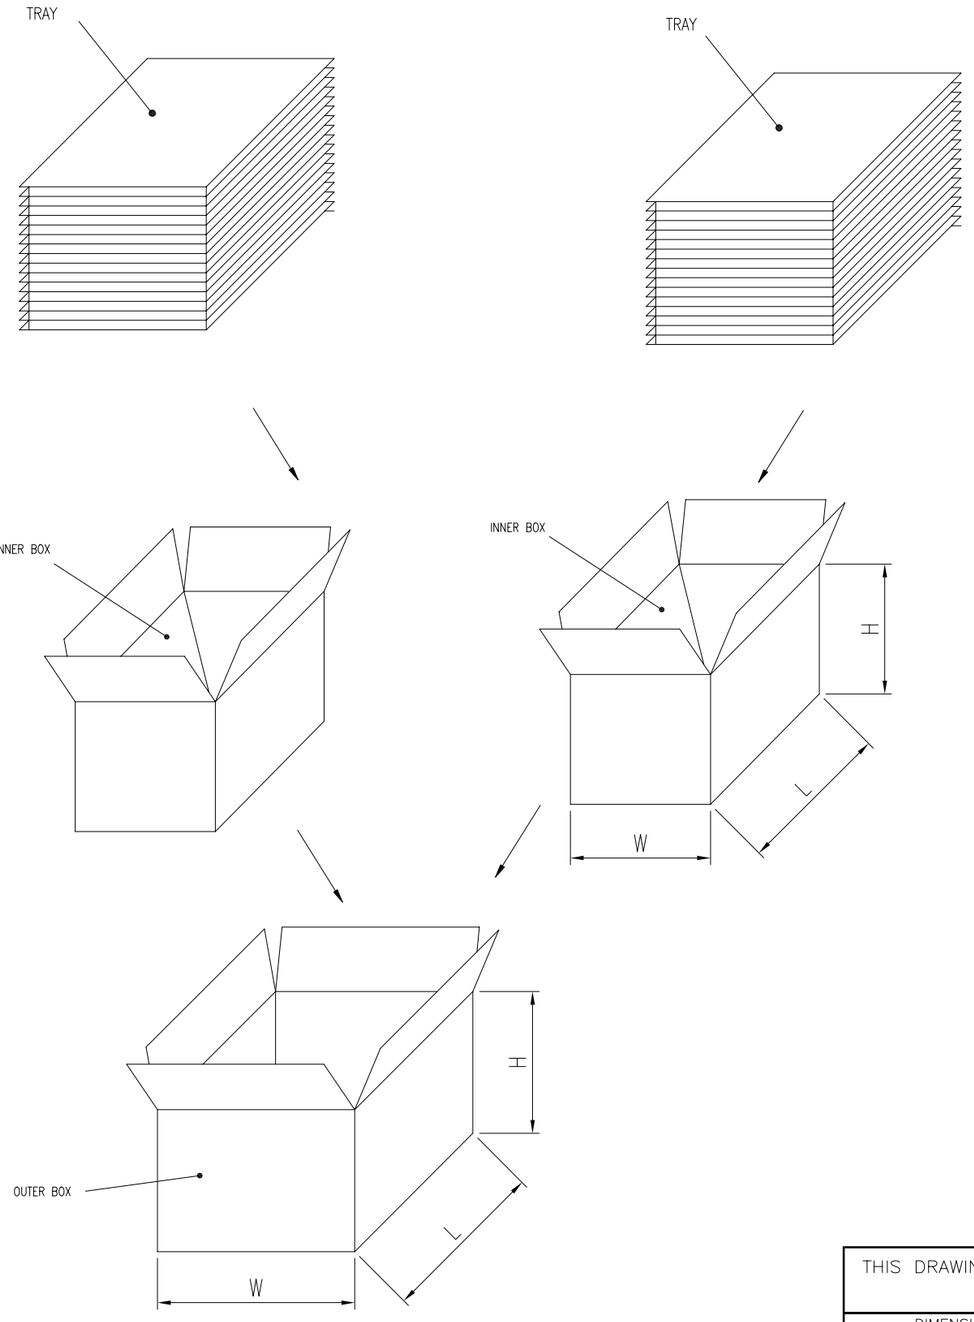

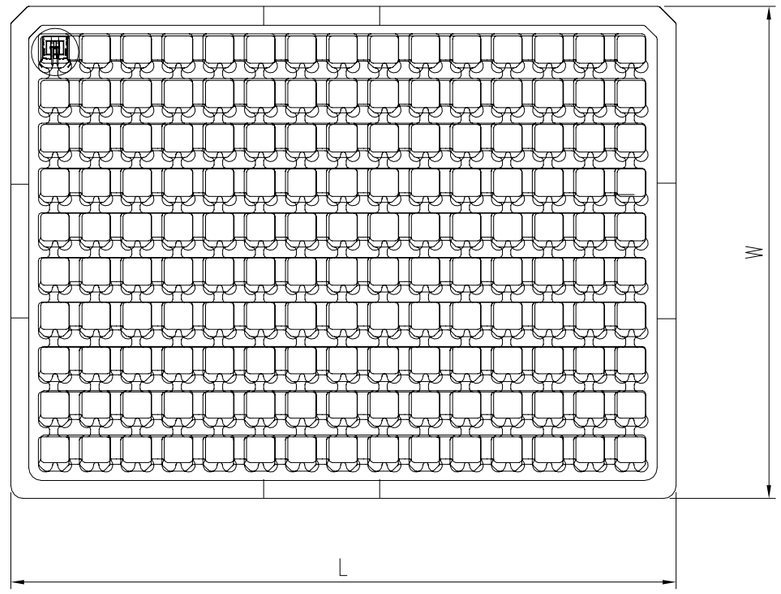

TRAY LAYOUT

NOTE:
1. MATERIAL:
   TRAY : PS.
   INNER BOX : CORRUGATED FIBERBOARD.
   SHIPPING CARTON : CORRUGATED FIBERBOARD.
2. DIMENSION:
   TRAY : L=315, W=230, H=18mm.
   INNER BOX : L=330, W=245, H=227mm.
   SHIPPING CARTON : L=509, W=345, H=248mm.
3. QUANTITY:
   PRIMARY PACKING : 150 PCS/TRAY.
   SECONDARY PACKING : 12 TRAY/CARTON(1,800PCS).
   THIRDLY PACKING : 2 INNER BOX/CARTON(3,600PCS).
4. WEIGHT:
   NET WEIGHT : 9.0kg.
   GROSS WEIGHT : 10.0kg.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ±–

MATERIAL: SEE NOTE

FINISH: SEE NOTE

DWN | CHK | APVD | PRODUCT SPEC | APPLICATION SPEC | WEIGHT

TE Connectivity

NAME: UBS CONN, SERIES B, A4P, R/A, THRU HOLE, W/ BACK SHELL

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1734376	—

CUSTOMER DRAWING | SCALE — | SHEET 2 OF 2 | REV B

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

175977-2 2-292161-3 3631B101LL 936348-1 SBCHE154R7K 2005330-1 2834055-1 650075-000 917696-1 CRGCQ2010J3K3 2310537-1 2377783-2 3-1393225-0 SBCHE64R7K 1-962915-1 1393431-1 3430B2F51RTDF SMW73R0JT 1903112-2 1743455-2 141991-2 1969656-1 2380312-2 TE50BR39J 1-794222-0 CPF0402B37K4E1 MPT100C18RF RH73H2A40MKTN ROX05SJ18R U5254-000005-030PA