
Relay module; Relay with 1 changeover contact (1u); with extended input voltage and temperature range; with miniature switching relay

www.wago.com/286-394/004-000



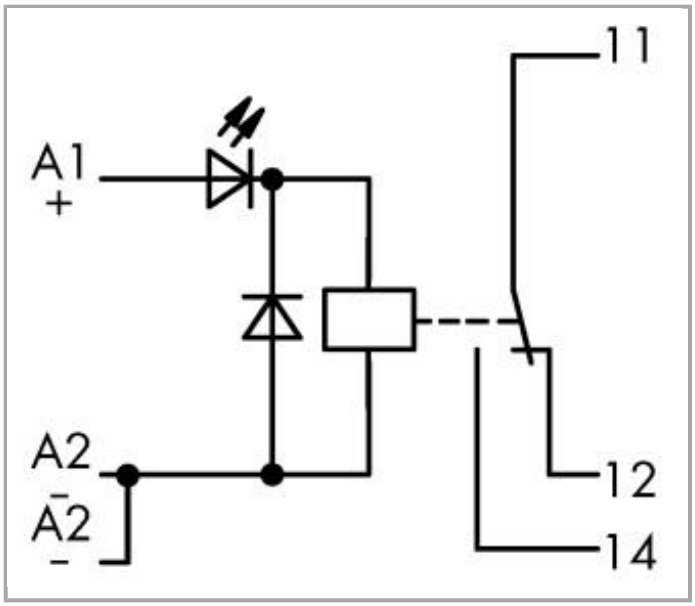


RoHS ✓ Compliant

BOMcheck.net

Color:

Downloaded from Arrow.com.

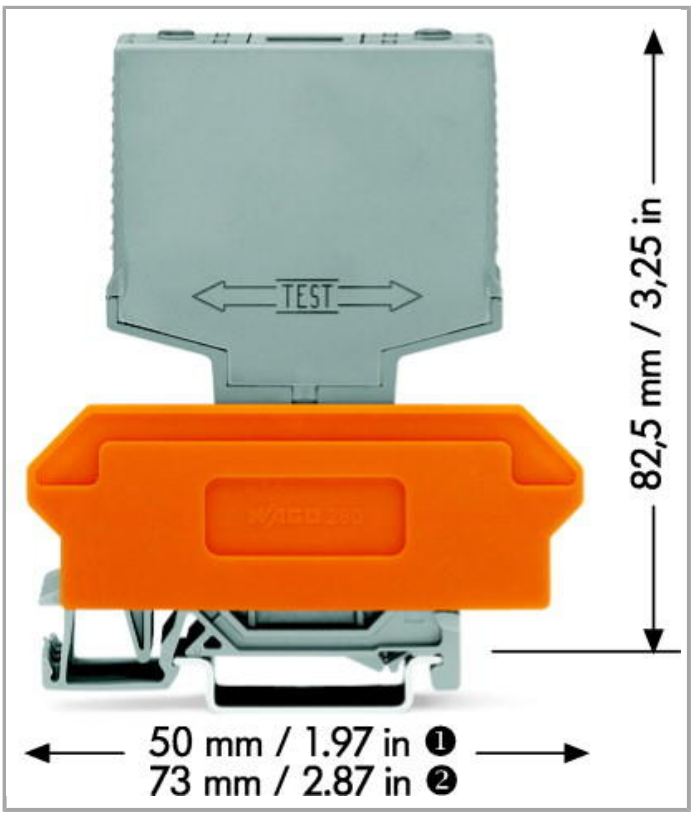

Data

Technical Data

Control circuit

Nominal input voltage U_N	24 VDC
Input voltage range	-30 … +25 %
Nominal input current at U_N	21.8 mA

Load circuit:

Number of changeover/switchover contacts	1
Contact material (relay)	AgNi + Au
Limiting continuous current	1 A
Max. switching voltage	250 VAC
Pull-in time (typ.)	9 ms
Drop-out time (typ.)	3 ms
Bounce time (typ)	2 ms

Safety and protection:

Rated voltage	250 V
Rated impulse voltage	4 kV

Downloaded from Arrow.com.

Pollution degree	2
Dielectric strength, control/load circuit (AC, 1 min)	4 kV_{rms}
Dielectric strength, control/load circuit (AC, 1 min)	4 kV_{rms}
Degree of protection	IP20

Geometrical Data

Width	15 mm / 0.591 inch
Height from upper-edge of DIN-35 rail	82.5 mm / 3.248 inch
Depth	52 mm / 1.654 inch

Mechanical data

Type of mounting	Pluggable module for carrier terminal blocks

Material Data

Color	light gray
Fire load	0.324 MJ
Weight	26.09 g

Environmental Requirements

Surrounding air (operating) temperature at U_N	-25 … 70 °C
Pollution degree	2

Standards and specifications

Standards/specifications	EN 60664-1

Commercial data

Country of origin	DE
GTIN	4045454496388
Product Group	6 (Interface Electronics)

Compatible products

Marking accessories



Item no.: 209-701
WSB marking card; as card; not stretchable; plain; snap-on type
www.wago.com/209-701



Item no.: 209-701/000-002
WSB marking card; as card; not stretchable; plain; snap-on type
www.wago.com/209-701/000-002

Downloaded from Arrow.com.

	**Item no.: 209-701/000-005** WSB marking card; as card; not stretchable; plain; snap-on type	www.wago.com/209-701/000-005
	**Item no.: 209-701/000-006** WSB marking card; as card; not stretchable; plain; snap-on type	www.wago.com/209-701/000-006
	**Item no.: 209-701/000-007** WSB marking card; as card; not stretchable; plain; snap-on type	www.wago.com/209-701/000-007
	**Item no.: 209-701/000-012** WSB marking card; as card; not stretchable; plain; snap-on type	www.wago.com/209-701/000-012
	**Item no.: 209-701/000-017** WSB marking card; as card; not stretchable; plain; snap-on type	www.wago.com/209-701/000-017
	**Item no.: 209-701/000-023** WSB marking card; as card; not stretchable; plain; snap-on type	www.wago.com/209-701/000-023
	**Item no.: 209-701/000-024** WSB marking card; as card; not stretchable; plain; snap-on type	www.wago.com/209-701/000-024

Downloads

Documentation

Additional Information

Disposal; Electrical and electronic equipment, Packaging	Oct 15, 2018	Download 265.8 kB

Subject to changes.

WAGO Corporation
Germantown, WI 53022
32423 Minden
Phone: +49571 887-0 | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at {0}.

Downloaded from Arrow.com.