
SPECIFICATIONS

Model Number: WT24Z7-E2
Part Number: 16003387A Feb. 16, 2013

Mechanical Drawing:

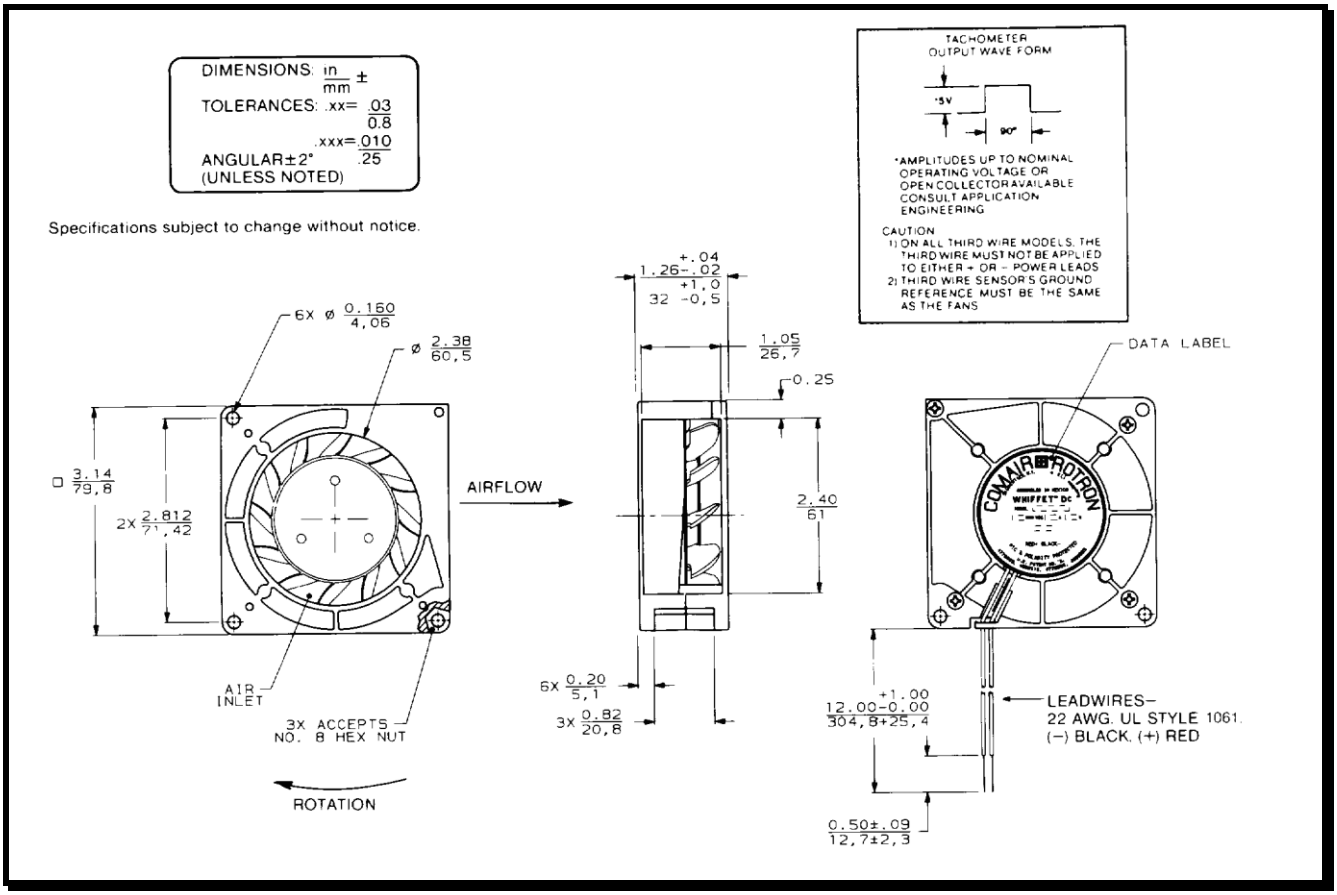

Motor:

Nominal Voltage	= 24 vdc
Operating Voltage Range	= 12 to 28 vdc
Nominal Running Current	= 0.42 Amps
Max. Locked Rotor Current	= 1.50 Amps
Running Power	= 10.2 Watts
Average Speed	= 5300 RPM
Bearings	= Ball
Air Flow	= 20 CFM
Acoustic	= 56.8 dBA

Construction:
Venturi: Plastic, Black, UL 94V-0
Propeller: Polypropylene, Black, UL 94V-0

Life Expectancy:
This fan is designed for continuous duty life of 70,000 hours at 25°C.

Agency Approvals:
UL, CE

Additional Features:
Brushless DC Motor
Locked Rotor Protection
Automatic Restart Capability
Polarity Protected
Operating Temperature: -10°C to 70°C
Storage Temperature: -40°C to 85°C
Enviroshield Type 2

Tachometer:
Output: 5v TTL Compatible
I_c: 5mA Typical
Pulses per Revolution: 2
Isolated: No

Termination:
12" leadwires, 22AWG, UL 1061
Red - Power (+)
Black - Return (-)
Blue/white - Tach

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Comair Rotron:

19030616A 19039671A 032620 039824 19039646A CLE2L2 19020188A 17001178A 17002016A 19030389A 19031092A 17001219A GDA1238-48BB MD24B5-E2 19039030A 031176 17002001A 19028868A 19028933A 19032105A 19039306A 031081 17002087A 19030622A 19032183A 19039299A GL24B7-E2 19039031A MA2B3 19031842A 032772 476042 032740 19028885A