NOTES:
1. MATERIALS AND FINISHES:
   BODY - BRASS, NICKEL PLATING
   CONTACT - PHOSPHOR BRONZE, GOLD PLATING
   INSULATOR - PTFE , NATURAL


2. ELECTRICAL:
   A. IMPEDANCE: 50 OHM
   B. FREQUENCY RANGE: DC - 4 GHz
   C. VSWR(RETURN LOSS): 1.30 MAX.
   D. RF LEAKAGE: 55 dB MIN. @ 3 GHz
   E. INSULATION RESISTANCE: 5000 MΩ MIN

3. MECHANICAL:
   A. DURABILITY: 500 CYCLES MIN.
   B. TEMPERATURE RANGE: -65° C TO +165° C


THIRD ANGLE PROJ.

REVISIONS


REV	DESCRIPTION	DATE	ECO	APPR
--	RELEASE TO MFG.	--	--	--
B	NOTES ADDED	12-Jun-08	100028	--
C	REDRAWN IN PRO-E & COD SHEET ADDED	18-May-15	50540	NR

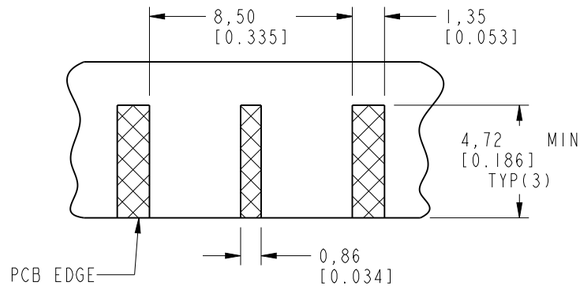


RECOMMENDED PCB DIMENSIONS - TOP

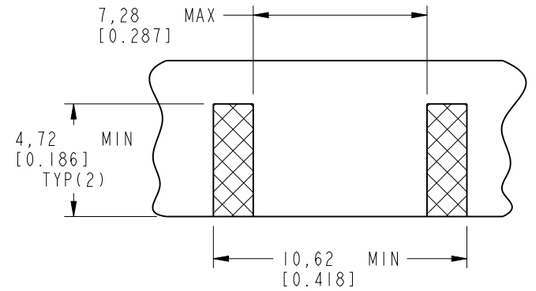


RECOMMENDED PCB DIMENSIONS - BOTTOM



SCALE 2.500

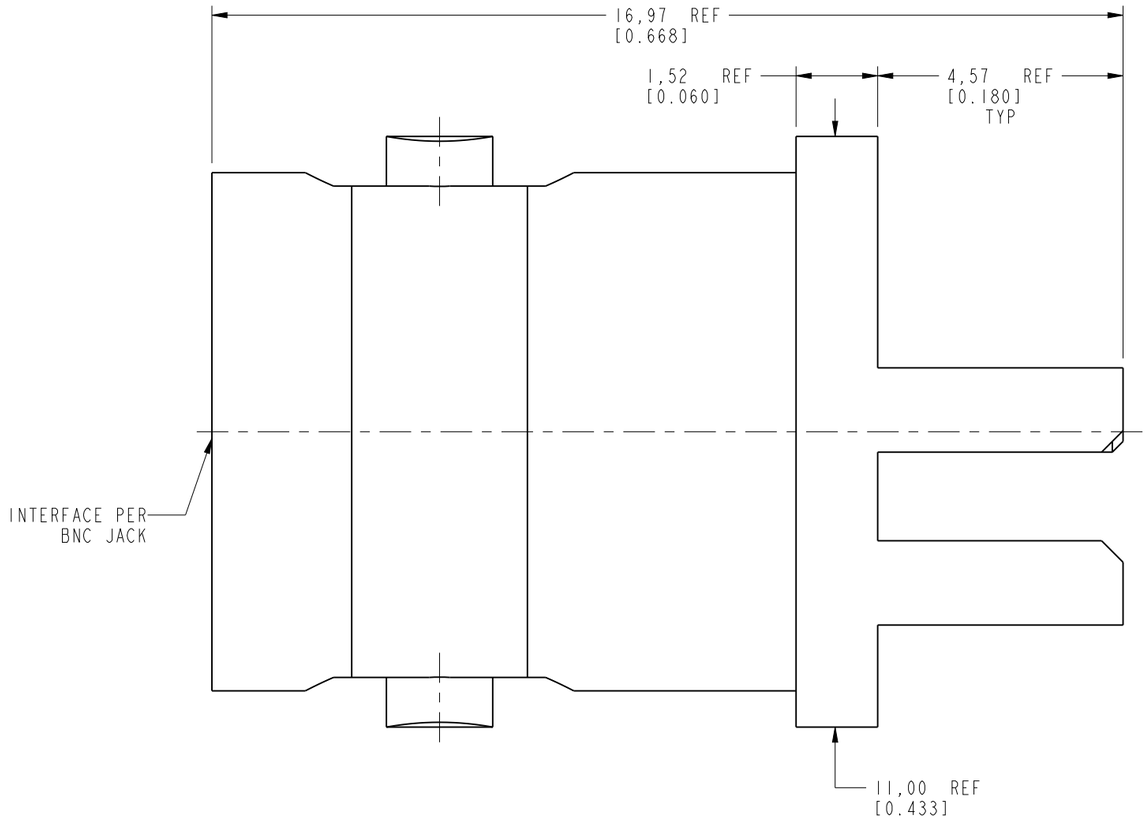

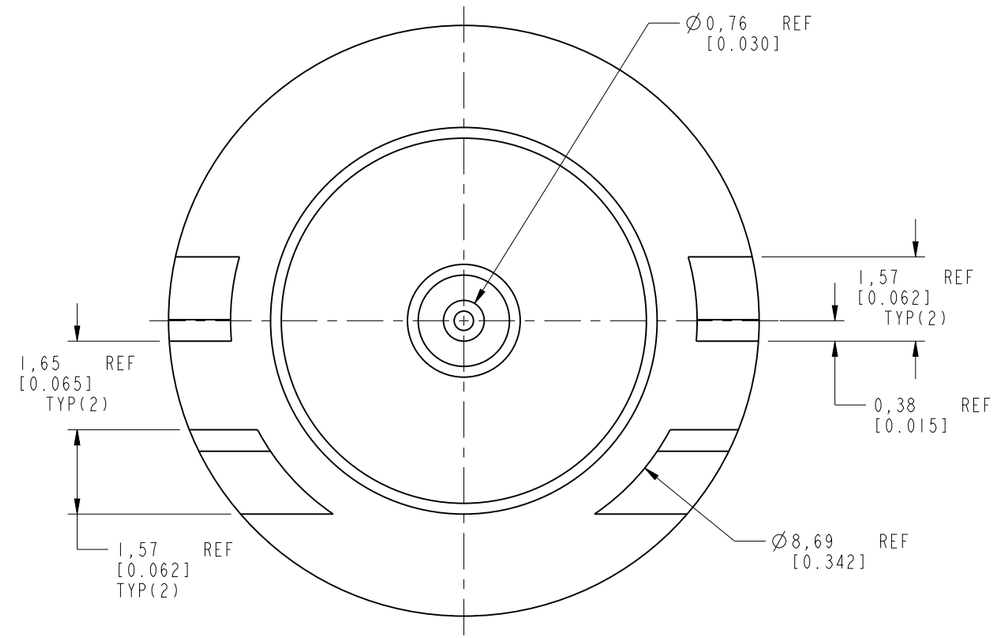

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:				
<0.5mm	0.5 - 6mm	6 - 30mm	30 - 120mm	ANGLES
± 0.05mm	±0.1mm	±0.2mm	± 0.3mm	±1°

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL	DRAWN STAR	DATE 18-May-15	TITLE: BNC STR JACK EDGE MOUNT RECEPTACLE
	ENGINEER K.CAPOZZI	DATE 07-May-15	
REFERENCE B625100-006-NT3G-50	APPROVED S.HSIEH	DATE 18-May-15	SCALE: 9.0:1.0 SHEET 3 OF 3
CONFIGURATION LEVEL: In Work	CAD FILE		DWG SIZE B / REV C
FINISH			

Amphenol Connex

DRAWING NO.
ITEM NO.
PART NO. 112640

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

68001-200HLF 69192-408HLF 70234-112LF 86130202123355E1LF LD25S33E4GV00LF 65781-158 68000-236HLF 70430-164LF 86093968813H45V1LF 863013A 95157-140LF CD15S13E4RV09LF 86093968191755E3LF D15P13A6RV12LF RJE061661210 RJSBE5080C2 68002116HLF 70218-1116LF 86093967896755LF DEM09P032N 86093488314745V1LF DCMF37P LD15P33E4GV00LF 76384-316LF 54202-G0805CLF 67996-204HLF 91614-403ALF DAPO15S365TLF 54202-S08-07LF 68001-108HLF