ENVELOPE / ASSEMBLY DRAWING


008974

SPECIFICATION CONTROL DRAWING


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES, LTD. ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

REV	DESCRIPTION	DWN	DATE	APPROVED
A	ENGINEERING RELEASE	CZS	7/16/89	R. RICE


ALL DIMENSIONS ARE REFERENCE ONLY

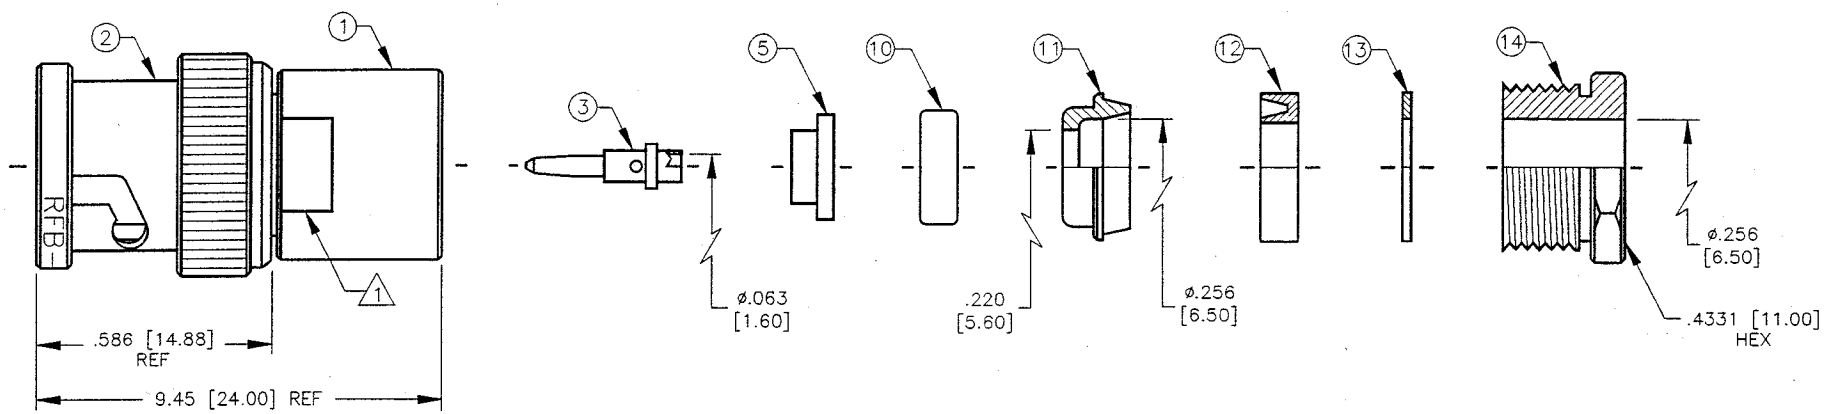

1 .4375 WRENCH FLATS 2 AT 180°



SUGGESTED STRIPPING INSTRUCTIONS

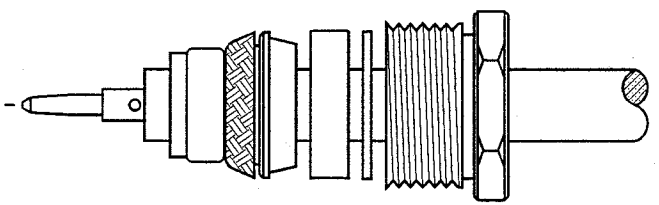

PIN TO BE SOLDERED

SPECIFICATIONS:

IMPEDANCE: 50 OHMS
WORKING VOLTAGE: 500 VRMS @ SEA LEVEL
FREQUENCY RANGE: 0–4 GHz
INSERTION LOSS: ≤ –.2 dB @ 3 GHz
VSWR MAX: 1.4:1 @ 3 GHz
INTERFACE PER MIL–STD–348A, SECTION 301.1

ITEM	DESCRIPTION	QTY	MATERIAL	FINISH
14	BACK NUT	1	BRASS	NICKEL
13	WASHER	1	BRASS	NICKEL
12	GASKET	1	S.I. RUBBER	RED
11	CLAMP	1	BRASS	NICKEL
10	COMPRESSION RING	1	BRASS	NICKEL
9	WASHER	1	BRASS	NICKEL
8	SPRING	1	BRASS	NICKEL
7	SPLIT LOCK WASHER	1	SK–5	NICKEL
6	GASKET	1	S.I. RUBBER	RED
5	DIELECTRIC	1	DELRIN	NONE
4	DIELECTRIC	1	DELRIN	NONE
3	PIN	1	BRASS	GOLD
2	SHELL	1	BRASS	NICKEL
1	BODY	1	BRASS	NICKEL

DIMENSIONS ARE IN INCHES AND [MILLIMETERS]

UNLESS OTHERWISE NOTED TOLERANCES ARE:
DECIMALS DIAMETER

DRAWN	C. ZUNIGA	7/16/98
CHECKED	B. Zuniga	7/20/98
QR DRAWN	C. ZUNIGA	7/16/98
APPROVALS		DATE

RF connectors
DIVISION OF RF INDUSTRIES, LTD.
7610 MIRAMAR RD
SAN DIEGO,CA 92126
(619)549–6340
(619)549–6345 FAX

RFB–1101–1X

BNC MALE CLAMP

SIZE	CABLE GROUP	DWG NO.	REV
A	X	8937	A

SCALE: 2:1 | CAD FILE 13ARC B | SHEET 1 OF 1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

RF Industries:

RFD-1610DS-H4 RFN-1007-2SX RFU-507-SI RFU-601-3 RFU-633 RFW-5573-16 RFW-5573-60 RQA-5000-SR2LP RFU-602-2 RFU-632 RQN-1300-SR2 RSA-3478 COMP-TM-400PL RF123-7052-1B RFW-5573-7 RFU-601-1X RF123-7002-B RFD-1601-HPL RFU-500 RFU-600-6C1 RFW-12404-30-5 RFB-1137 RFD-225M-SR2 RFT-1239 RFU-505 RQA-5010-SR2LP RSA-3252-C RSA-3402 RFB-1124-1X RFU-600-5