Part Number : 787301004
Product Description : DDR4 DIMM Socket, Vertical Surface Mount, 0.76µm Gold Plating, 288 Circuits, PCB Thickness 1.57mm, with Forklock, White Housing, Black Latch
Series Number : 78730
Status : Obsolete
Product Category : Memory Module Connectors

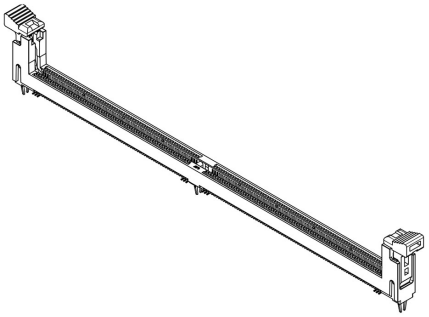

Documents & Resources

Product Environment Compliance

Compliance

GADSL/IMDS	Compliant with Exemption 44; 34; 33
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2024)4144-DC (27 June 2024)
EU RoHS	Compliant per EU 2015/863

Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

EU RoHS Certificate of Compliance

Part Details

General

Status	Obsolete
Category	Memory Module Connectors
Series	78730
Description	DDR4 DIMM Socket, Vertical Surface Mount, 0.76µm Gold Plating, 288 Circuits, PCB Thickness 1.57mm, with Forklock, White Housing, Black Latch
Component Type	Socket
JEDEC Outline	MO-309
Product Family	DDR4 DIMM Sockets
Product Name	DDR4 DIMM
UPC	887191429830

Agency

CSA	1409726
UL	E29179

Electrical

Current - Maximum per Contact	0.75A
Voltage - Maximum	29V AC (RMS)/DC

Physical

Circuits (Loaded)	288
Circuits (maximum)	288
Durability (mating cycles max)	25
Entry Angle	Vertical (Top Entry)
Flammability	94V-0
Housing Color	Natural (Off-White)
Keying to Mating Part	None
Latch Color	Black
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	Nylon

Net Weight	6.202/g
Packaging Type	Tray
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.57mm, 3.18mm
Pitch - Mating Interface	0.85mm
Pitch - Termination Interface	0.85mm
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm
Temperature Range - Operating	-55° to +85°C
Termination Interface Style	Surface Mount

Solder Process Data

Max-Duration	10
Lead-Free Process Capability	REFLOW
Max-Cycle	3
Max-Temp	260

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

molex:

502584-0870 502585-0370 0351510214 197134001 355240920 502380-0800 528061110 0464363133 194290026 347910140 459850483 464373005 347072012 34708-2028 348242245 528520870 0477256010 194270031 348268126 357470310 5023860371 503988100 0194360214 351820290 528523070 194290039 197054301 347928042 349672001 502584-1060