623 Bulkhead connector

19 with ground spring-pin
insulation insert Code 0°
housing code 1
flange mount /Flange 25x25

Technical Data

number of pins	19
temperature range	-20 °C to 130 °C
protection type	when connected IP 66/67

Electrical Data

	signal
rated current	max. 7 A*
rated voltage	63 V (AC/DC)
rated insulation voltage (L-L)	1500 V
mating cycles	500

Data according to VDE 0110/EN61984, Paragraph 6.19.2.2

pollution degree	3
over voltage category	III
max. height for operation	2000 m

Material

housing	zinc diecast / nickel plated
insulation insert	PBT, UL 94 / V0
seals	FKM

Contacts (not part of product contents)

Tools (not part of product contents)

A DF A 278 NN 00 00 0151 000
A D A 278 N 00 00 0151 000



Contact Arrangement **Fehler!** **Fehler! Es wurde kein Dateiname angegeben.**
mating view


© 2018 TE Connectivity

TE Connectivity, TE connectivity (logo), intercontec (logo) and speedtec are trademarks.

While TE Connectivity (TE) has made every reasonable effort to ensure the accuracy of the information in this presentation, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this article are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

TE Connectivity Industrial GmbH
Bernrieder Straße 15
94559 Niederwinkling, Deutschland
Tel.: +49 9962 2002-0
Fax: +49 9962 2002-70
E-Mail: intercontec@te.com
Web: www.intercontec.biz

issue: 16.10.2018

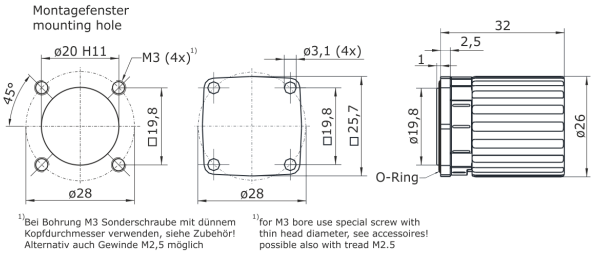

Main Dimensions
Bulkhead connector

*for max. wire cross-section pay attention to the cross-section of used contacts

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

539635-1 ROX9J120R SC30R33KT 1801174-1 2132781-3 ROX9J100R ROX9J160R ROX9J820R T4112401051-000 1-350945-0 2149966-1 336330-1 322335 ROX9J4K3 1622820-6 5174225-5 ROX9J2K4 SMA-A0102FTDL10K 1-316080-2 363549-000 828801-6 MPT100C8K2F SMF3100KJT 320552 641763-1 7-2178711-4 967116-2 1-917659-5 173796-E 2008571-3