CUI DEVICES

MODEL: CUSP-T80-12-2600-TH | **DESCRIPTION:** ULTRASONIC SENSOR

FEATURES

- plastic can
- open type
- transmitter
- SPL 115 dB
- detectable range 12 meters



RoHS

SPECIFICATIONS


parameter	conditions/description	min	typ	max	units
type	transmitter				
operating voltage	at 25 kHz			180	Vp-p
frequency		24	25	26	kHz
sound pressure level	at 10 V, 30 cm, sine wave	115			dB
directivity			80		degree
capacitance	at 1 kHz	2,080	2,600	3,120	pF
detectable range		0.2		12	m
dimensions	Ø16.5 x 12.0				mm
material	ABS				
terminal	pins (iron with tin plating)				
weight			2.0		g
operating temperature		-30		85	°C
RoHS	yes				


SOLDERABILITY

parameter	conditions/description	min	typ	max	units
hand soldering	for 3 ± 0.5 seconds	370	380	390	°C

MECHANICAL DRAWING

units: mm

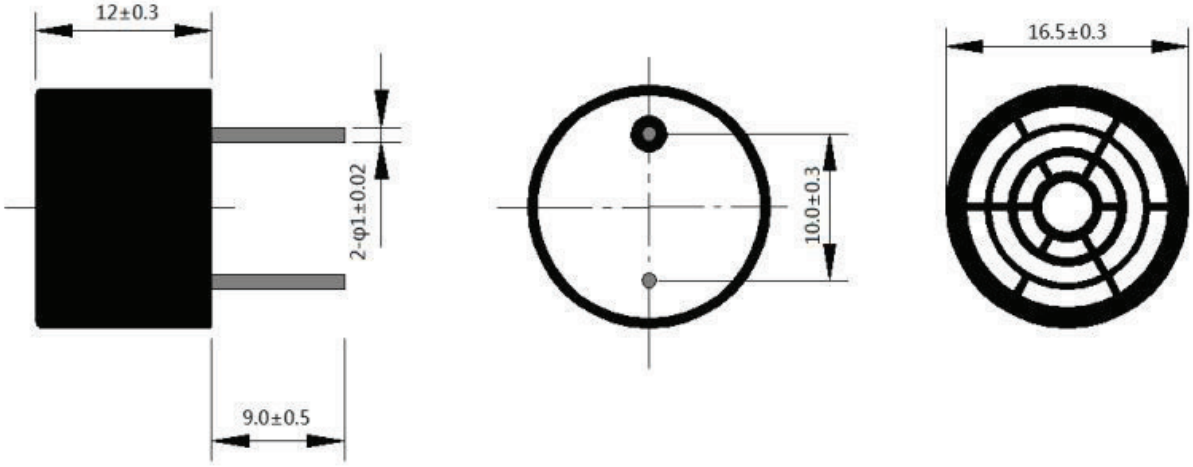


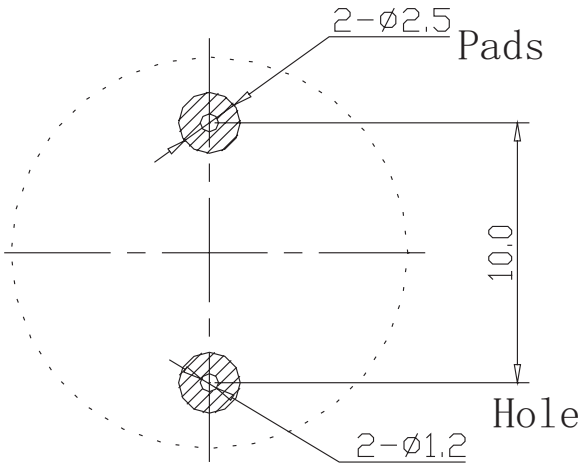


Recommended PCB Layout
Top View

BEAM PATTERNS

SPL vs. Frequency

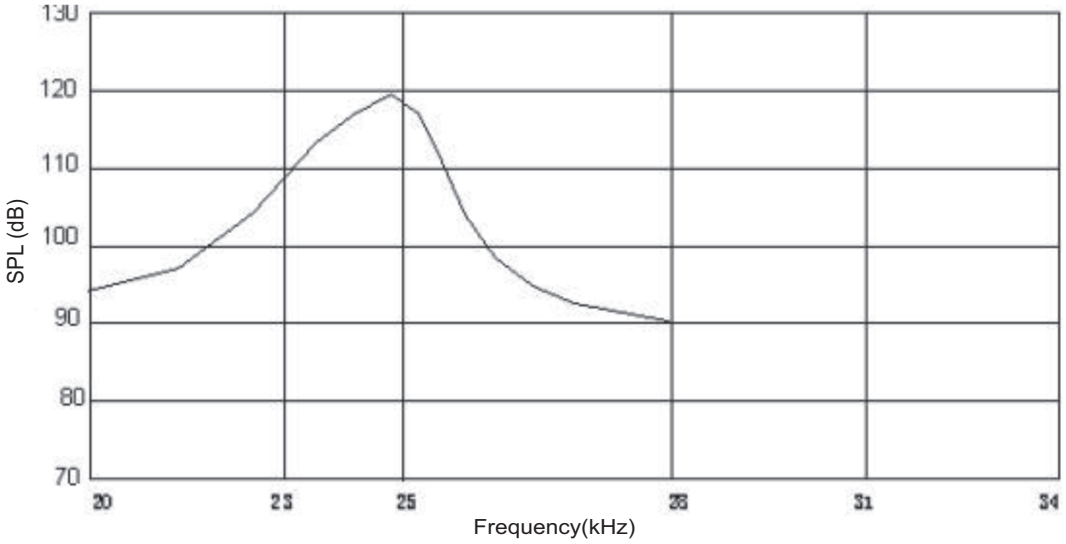


Directivity

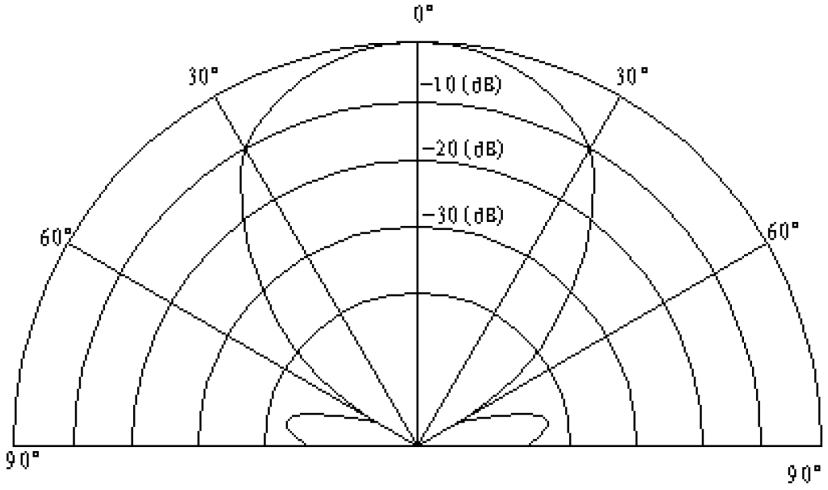


PACKAGING

units: mm


Tray Size: 240 x 160 x 30 mm
Tray QTY: 50 pcs per tray
Carton Size: 480 x 280 x 320 mm
Carton QTY: 2,000 pcs per carton

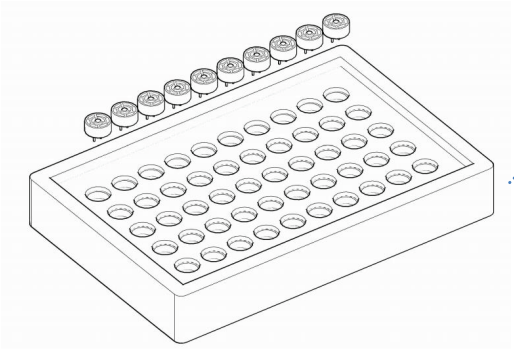

50PCS/BOX
BOX SIZE:24*16*3CM

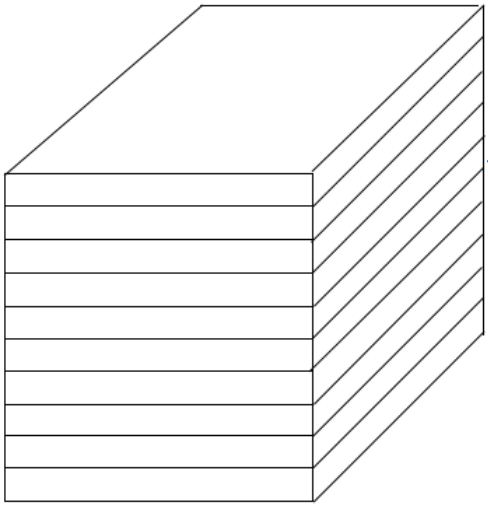

10BOXES/STACK, TOTAL 500PCS
STACK SIZE:24*16*24CM

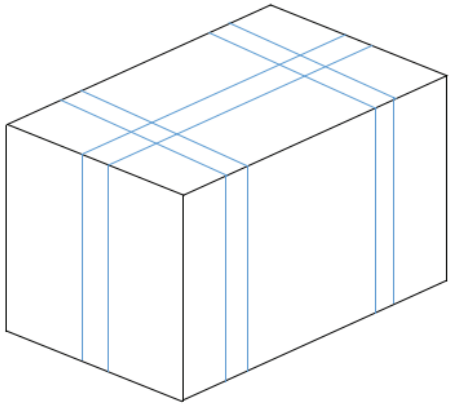

2000PCS/CARTON
CARTON SIZE:48*28*32CM

REVISION HISTORY

rev.	description	date
1.0	initial release	12/02/2020

The revision history provided is for informational purposes only and is believed to be accurate.

CUI DEVICES

CUI Devices offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI Devices reserves the right to make changes to the product at any time without notice. Information provided by CUI Devices is believed to be accurate and reliable. However, no responsibility is assumed by CUI Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI Devices products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

cuidevices.com

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Same Sky:

CFM-A238BF-270-651 CMA-4544PF-W CPI-1375IC-80T PJ-058AH SJ-43516-SMT-TR-PI
CDM1222-12A-FW-F16-050-67 CMC-5042PF-AC SJ1-3535N CFM-2510B-0130-275 TB007-508-02BE
TBL004V-508-02BE-2GY CBT-09427-SMT-TR CMI-9653S-SMT-TR CMP-5247TF-K PJ-202AH
PR4-5V-450-1A DS04-254-2-02BK-SMT CFM-6015V-239-292-20 CPT-1117-83-SMT-TR HSE-B20350-NP
SJ-2523-SMT-TR TBP02P1-381-10BE CFM-2507CF-0140-313 CPM-2H PJ-067B TBP01R1-508-14BE
UJ32-C-H-G-L1-MSMT-TR CMM-2718AT-42316-TR DS01C-254-S-03BE PJ-047BH