




ohne Ansaughaube / *without hood*




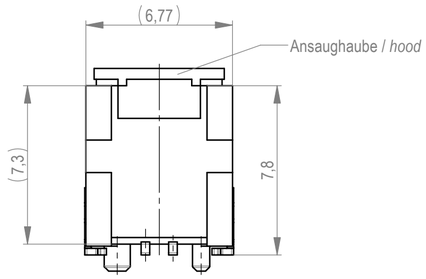


Verpackt im Gurt in Anlehnung an DIN IEC 60286-3
tape on reel packaging according to DIN IEC 60286-3
Verpackungseinheit: 440 Stück
packaging unit: 440 pcs

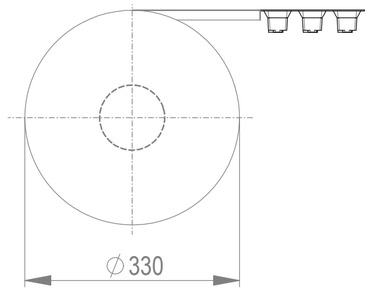


Codierung Variante rot
coding variant red




Codierung Variante grün
coding variant green




Codierung Variante blau
coding variant blue





ohne Ansaughaube / *without hood*







Abspulrichtung - *reel off direction*

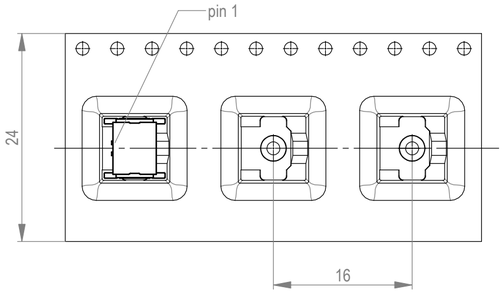





Layoutvorschlag
recommended layout

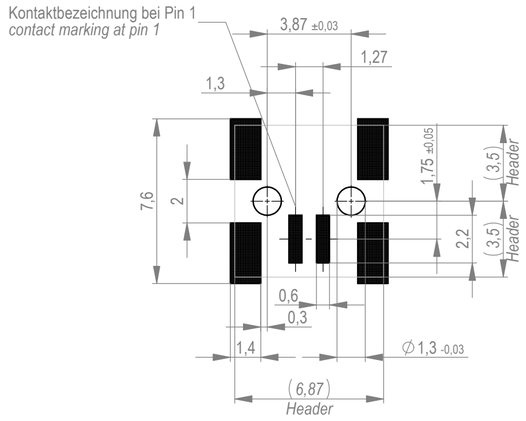

Anforderungsstufe 1
performance level 1

Kontaktbereich vergoldet
mating area gold plating

Anschlussbereich verzinnt 4-6 µm
terminal area 4-6 µm tin plating

Koplanarität der Anschlüsse ≤ 0,1 mm
coplanarity area of termination ≤ 0,1 mm

504348		rot *red*	0,6	
504347		grün *green*	0,6	
504346		blau *blue*	0,3	
504345		schwarz *black*	0,3	
Ident-Nr. *part-no.*	Codierung *coding*	Farbe *colour*	A	Bemerkung *remark*

"Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Geschmacksmustereintragung vorbehalten. The reproduction and distribution of this document as well as the utilization of its contents and communication to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.

Die deutsche Version dieser Zeichnung dient nur zur Erleichterung der Handhabung. Bei Abweichungen von dem englischen Original gilt das englische Original.
*The German version of this drawing has been offered for convenience only and may deviate from the english original.
In case of any deviation the English version shall prevail.*

Dimension no.	Tolerances ISO 2768-fH ISO 8015	All Dimensions in mm	Scale 5:1	Material
Customer drawing: All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Subject to modification without prior notice. Drawing will not be updated.		MicroBridge Male Straight SMT 02-pin	
e 14.09.2020 Index Date	ERNI International AG Zürichstrasse 72 8306 Brüttisellen - Zürich Switzerland		504344	I A2
			Class MCBP	

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

CRGCQ2010J3K3 ROX05SJ18R SBCHE64R7K 1-794222-0 175977-2 3-1393225-0 SBCHE154R7K 141991-2 1903112-2 1969656-1 917696-1 1-962915-1 MPT100C18RF 1393431-1 3430B2F51RTDF CPF0402B37K4E1 RH73H2A40MKTN SMW73R0JT 2380312-2 2-292161-3 2377783-2 650075-000 TE50BR39J U5254-000005-030PA 2834055-1 1743455-2 2005330-1 2310537-1 3631B101LL 936348-1