


| REVISIONS | | | | | |
|---|---|---|---|---|---|
| REV. | ECN NO. | LOCATION | DESCRIPTION | DATE | DESIGN |
| A1 | N/A | | 图框升级整理图面 | 2024.07.31 | 阿 树 |
| | | | | | |

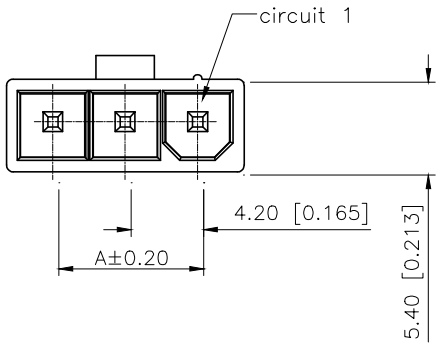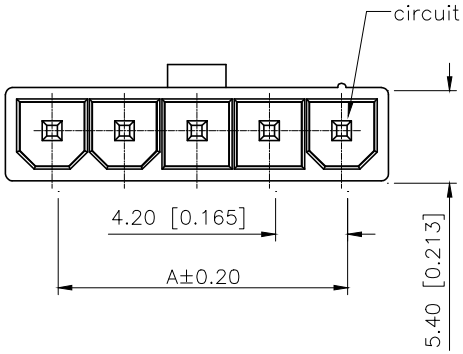

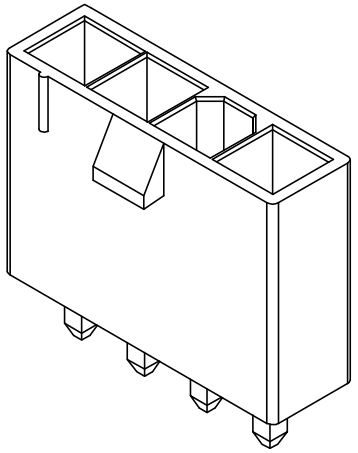



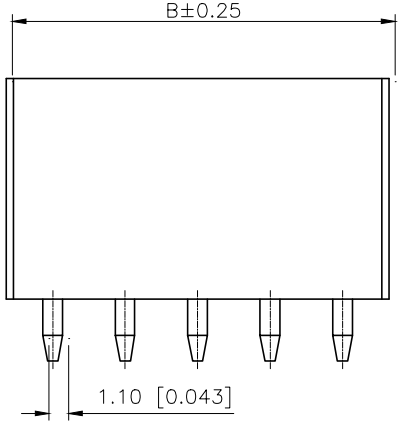
■SPECIFICATIONS
- Voltage rating:600V AC/DC
- Current rating:9A AC/DC
- Withstanding Voltage:1500V AC/minute
- Temperature range:−45°C+125°C
- Insulation resistance:≥1000MΩ
- Contact resistance:≤10mΩ


PART NO.:

X9357 W V−06−LP SW
① ② ③ ④ ⑤ ⑥

① Series No
② Category:W−Wager
③ Welding Board Angle:V−Straight 180°
④ Row No.Pin No:XX−02~12P
⑤ Material:LP−LCP 94V−0
⑥ Plating:SW−Matte Tin




PCB Layout
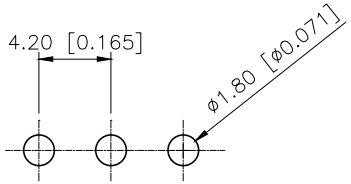
| Poles | Dimensions(mm) | | Poles | Dimensions(mm) | |
|---|---|---|---|---|---|
| | A | B | | A | B |
| 02 | 4.20 | 9.60 | 08 | 29.40 | 34.80 |
| 03 | 8.40 | 13.80 | 09 | 33.60 | 39.00 |
| 04 | 12.60 | 18.00 | 10 | 37.80 | 43.20 |
| 05 | 16.80 | 22.20 | 11 | 42.00 | 47.40 |
| 06 | 21.00 | 26.40 | 12 | 46.20 | 51.60 |
| 07 | 25.20 | 30.60 | / | | |

| X9357WV−06−LPSW | LCP | Brass | Matte Tin | X9357HM |
|---|---|---|---|---|
| PART NO | Material | Material(Pin) | Finish(Pin) | Suitable XKB Housing |

| ANGLAR | ±5° |
|---|---|
| X. | ±0.40 |
| X.x | ±0.30 |
| X.xx | ±0.20 |
| X.xxx | ±0.15 |
| UNSPECIFIED TOLERANCES | |

XKB

| | | | |
|---|---|---|---|
| DESIGN | 阿 树 | VIEW: | MODEL TYPE: 4.20 mm Crimp Style Connectors |
| CHECKED | | UNIT: mm/in | PART NO.: X9357WV−06−LPSW |
| APPROVED | | SIZE: A4 | DWG NO.: X−X9357WV−06−LPSW |

XKB INDUSTRIAL PRECISION CO.,LIMITED

| SCALE | PAGE | REVISION |
|---|---|---|
| N/A | 1/1 | A1 |