
SMT Common Mode Chokes

PA5140XXXNL & PA5141.XXXNL Series

Pulse
a YAGEO company

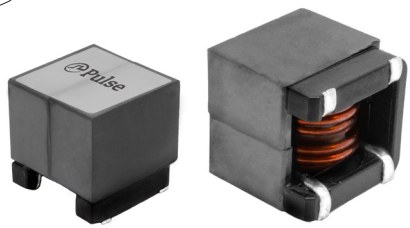

- *EP18 & EP22 Platforms*
- *19.5x19.8x19.2mm & 23.5x24.3x22.7mm*
- *110uH/33A to 350uH/13A*
- *1000Vrms Isolation (380Vrms continuous)*

Electrical Specifications @ 25°C – Operating Temperature -40°C to +125°C


Part Number	Inductance (1-2)=(4-3) (uH ±40%)	Irated (A)	Leakage Inductance (1-2) with (3-4) shorted (uH TYP)	Capacitance (1,2) to (4,3) (pF TYP)	DCR (1-2)=(4-3) (mΩ)		Self Resonant Frequency (1-2)=(4-3) (MHz TYP)	Impedance at SRF (kΩ TYP)
					TYP	MAX		
PA5140.105NL	154.0	21	0.7	5.0	1.70	2.2	3.30	0.82
PA5140.205NL	220.0	20	1.0	6.1	2.20	2.60	3.66	1.09
PA5140.305NL	305.0	17	1.5	7.2	3.20	3.85	3.00	1.57
PA5140.405NL	400.0	14	2.0	8.2	4.60	5.50	2.84	1.67
PA5141.105NL	110.0	32	0.7	6.5	0.90	1.10	2.82	0.50
PA5141.205NL	190.0	30	0.9	8	1.10	1.35	3.35	0.70
PA5141.305NL	260.0	26	1.3	5.3	1.70	2.10	2.82	1.05
PA5141.405NL	360.0	22	1.8	6	2.40	2.90	2.1	1.55
PA5141.505NL	470.0	18	2.0	5.7	3.50	4.20	1.96	1.95

NOTE:


1. The current rating (Irated) is based upon the temperature rise of the component and represents the rms current which will cause a typical temperature rise of 60°C with free air cooling.
2. The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.
3. Optional Tape & Reel packaging can be ordered by adding a "**T**" suffix to the part number (i.e. PA5140.105NL becomes PA5140.105NL**T**). Pulse complies to industry standard tape and reel specification EIA481.

Impedance Plots

PA5140.XXXNL

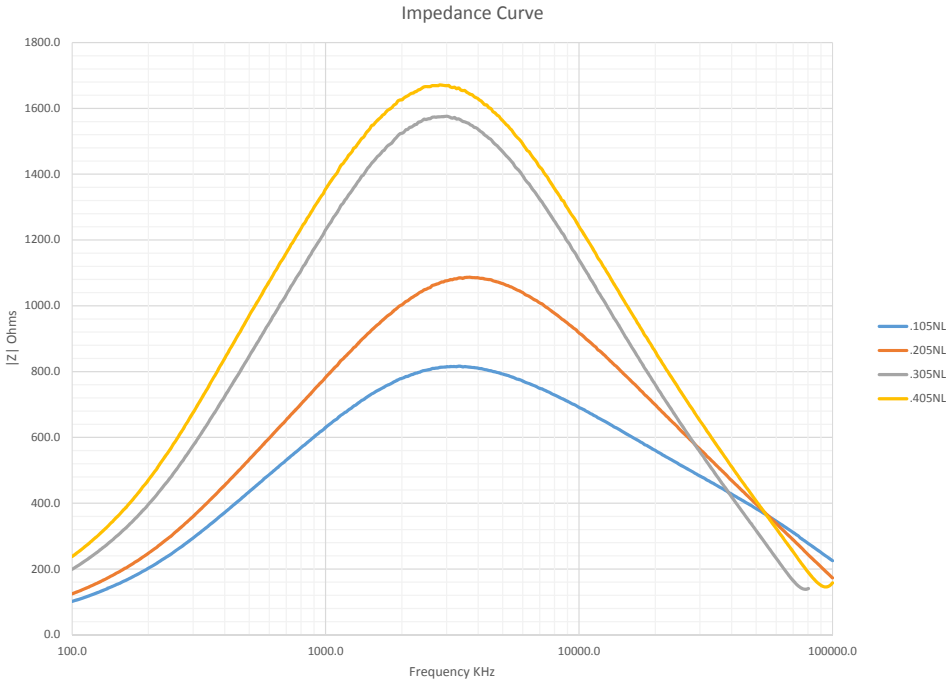

PA5141.XXXNL

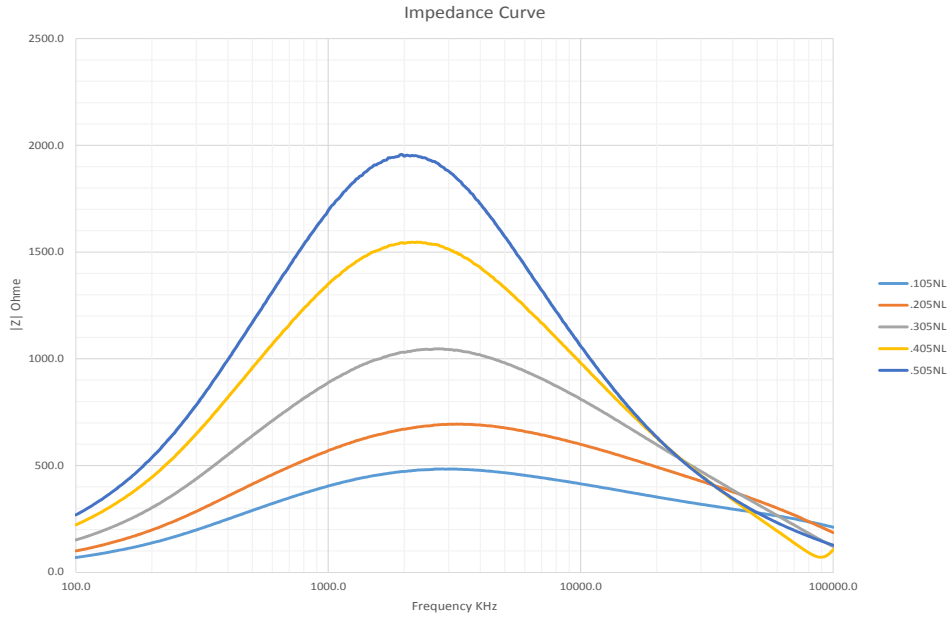


SMT Common Mode Chokes

PA5140XXXNL & PA5141.XXXNL Series

Mechanicals


PA5140.XXXNL

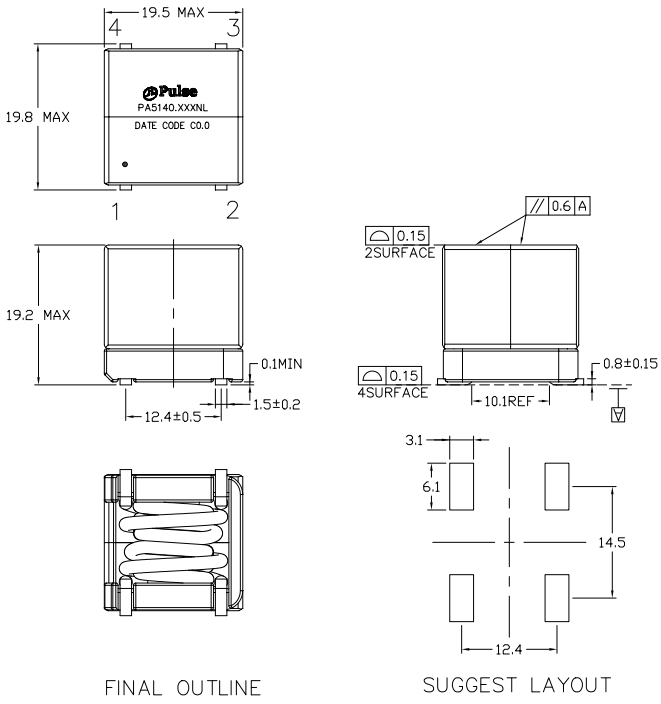

FINAL OUTLINE

SUGGEST LAYOUT


PA5141.XXXNL

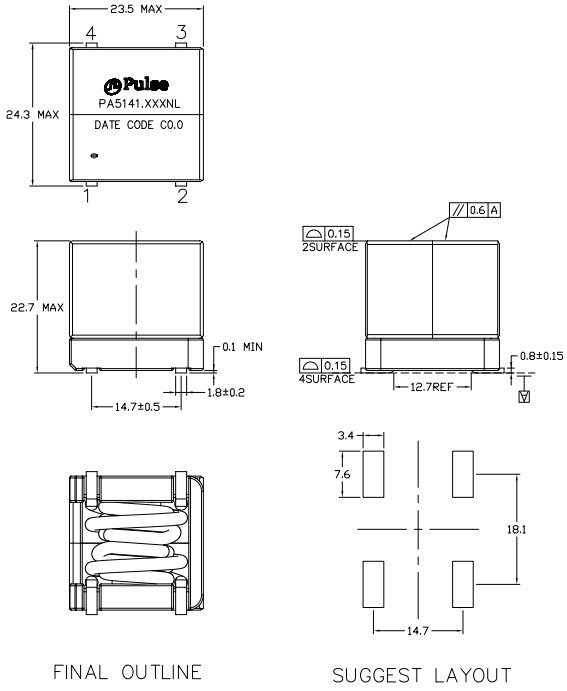

FINAL OUTLINE


SUGGEST LAYOUT

Schematic



Weight (TYP) ..... 20 grams
Tape & Reel ..... 70/ Reel
Dimensions: mm
Unless otherwise specified, all tolerance are ±0.25

Schematic



Weight (TYP) ..... 38 grams
Tape & Reel ..... 45/ Reel
Dimensions: mm
Unless otherwise specified, all tolerance are ±0.25

For More Information:

Americas - prodinfo_power_americas@pulseelectronics.com | **Europe -** prodinfo_power_emea@pulseelectronics.com | **Asia -** prodinfo_power_asia@pulseelectronics.com

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2021. Pulse Electronics, Inc. All rights reserved.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Pulse Electronics:

W3334B0150 PA0369NL PA4320.334NLT PA2744NL PA4343.361NLT PA4343.451NLT PD380-4000S1NF PGL6395.121HLT W1093 DPX1608LKF3R2460A PE-67100NL AWCS0012070736NJ00 W3078 PD617-6000M243 PE-68386NLT W1902 PA4320.104NLT ANT1204F007R0870A BBUP00201209121Y00 BSPQ000603041N4B00 BSPQ000603043N0B00 JXD2-0Z10NL P0585NL E5J88-032-02-L JXD0-2015NL PA4341.221NLT PA4341.301NLT PG2290.151HLT PAT6261.003NLT BDHE002520122R2MQ1