W2E142 Series Tubeaxial


150x172x38mm




- AC fans with external rotor shaded-pole motor.
- Die-cast aluminum housing. Impeller of sheet-steel, directly welded onto rotor.
- Air exhaust over struts. Rotational direction CCW looking at rotor.
- Mounting from either face using two 4.3 mm holes.
- Electrical connection via 2 flat pin terminals 2.8 x 0.5 mm.
- Mounting from either face using 2 4.3 mm (.169") holes.
- UL, CSA, VDE approvals on some models, please contact application engineering.

Part Number	Curve	CFM @ 0	VAC	Hertz	Power (W)	dBA	Max Amb. Temp C	Bearing Type	Features	Wgt. (lbs)
W2E142-CC13-16	1	175	115	60*	16	54	75	Ball	Terminals	1.98
W2E142-BB05-01	2	230	115	60*	24	57	70	Ball	Terminals	1.98
W2E142-CC15-16	1	175	230	60*	16	54	75	Ball	Terminals	1.98
W2E142-BB01-01	2	230	230	60*	28	57	70	Ball	Terminals	1.98

* 50 Hz data available upon request

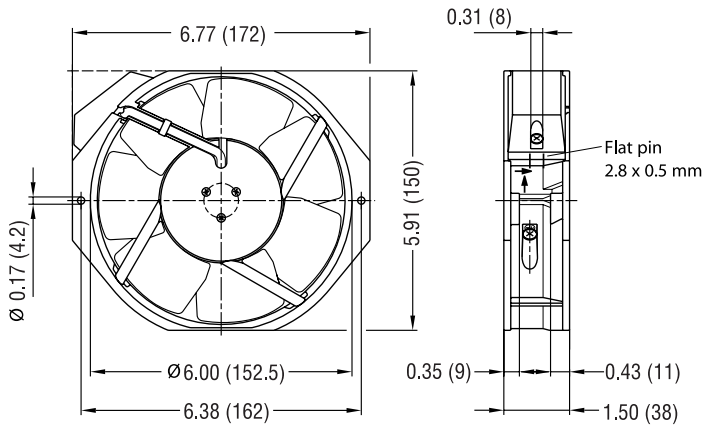

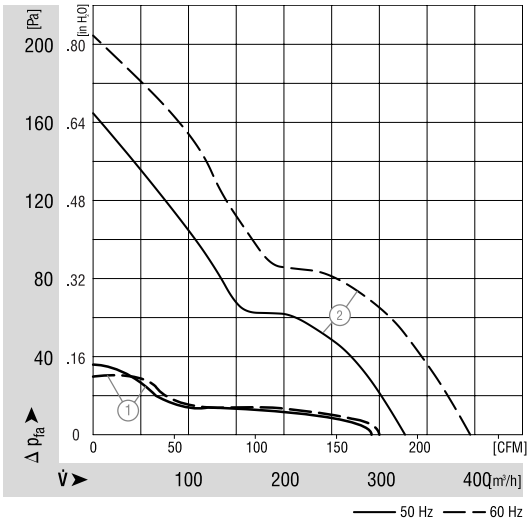

ebmpapst

e-mail: sales@us.ebmpapst.com · TEL: 860-674-1515 · FAX: 860-674-8536
ebm-papst Inc., 100 Hyde Road, Farmington, CT 06034 USA
ebm-papst Inc., 2006 © ebm-papst Inc. reserves the right to change any specifications or data without notice

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

ebmpapst:

4650X 6248N 8315100059 A2D170-AA04-01 QG030-148/12 G2E146-BF05-29 PMFA80 4414 F/2M 4600Z-881 8315100283 4412F/2M-504 8312 8315100229 G2E140-AI28-01 R2E180-AS77-40 W2S130-AA03-01 LZ 30-5 4114N/2H4 4412 F/2 96358-2-4013 R2E175-AC77-05 RG160-28/14N 4414FNH 7114NH 7212N 8412N/2G-185 3806 4314NHH A2D300-AD02-02 4580 Z