
CUI DEVICES

SERIES: DS05-127-SMT | **DESCRIPTION:** DIP SWITCH

FEATURES

- 1.27 mm pitch
- 2~10 pole options
- flat actuator
- surface mount
- tape & reel packaging



RoHS

SPECIFICATIONS

parameter	conditions/description	min	typ	max	units
rated voltage (per pole)	switching non-switching			24 50	Vdc Vdc
rated current (per pole)	switching non-switching			25 100	mA mA
withstanding voltage	for 1 minute		300		Vac
contact resistance	initial after life test			50 100	mΩ mΩ
insulation resistance	at 500 Vdc	100			MΩ
operating force				800	g
switch travel				0.6	mm
operating temperature		-40		85	°C
storage temperature		-40		85	°C
life		2000			cycles
flammability rating	UL94V-0				
RoHS	yes				

PART NUMBER KEY

DS05 - 127- 2 - **XX** BK - SMT - TR


Base Number

No. of Poles:
02 06
03 08
04 10

MECHANICAL DRAWING

units: mm
tolerance:
0.5<X≤3.0: ±0.15 mm
3.0<X≤6.0: ±0.20 mm
6.0<X≤30.0: ±0.25 mm
30.0<X≤120.0: ±0.30 mm
120.0<X≤400.0: ±0.50 mm
X>400.0: ±0.80 mm
unless otherwise noted

ITEM	DESCRIPTION	MATERIAL	PLATING/COLOR
1	actuator	PBT (UL94V-0)	white
2	housing	PBT (UL94V-0)	black
3	base	PBT (UL94V-0)	black
4	pin	copper alloy	gold
5	spring	copper alloy	gold
6	tape	polyimide	

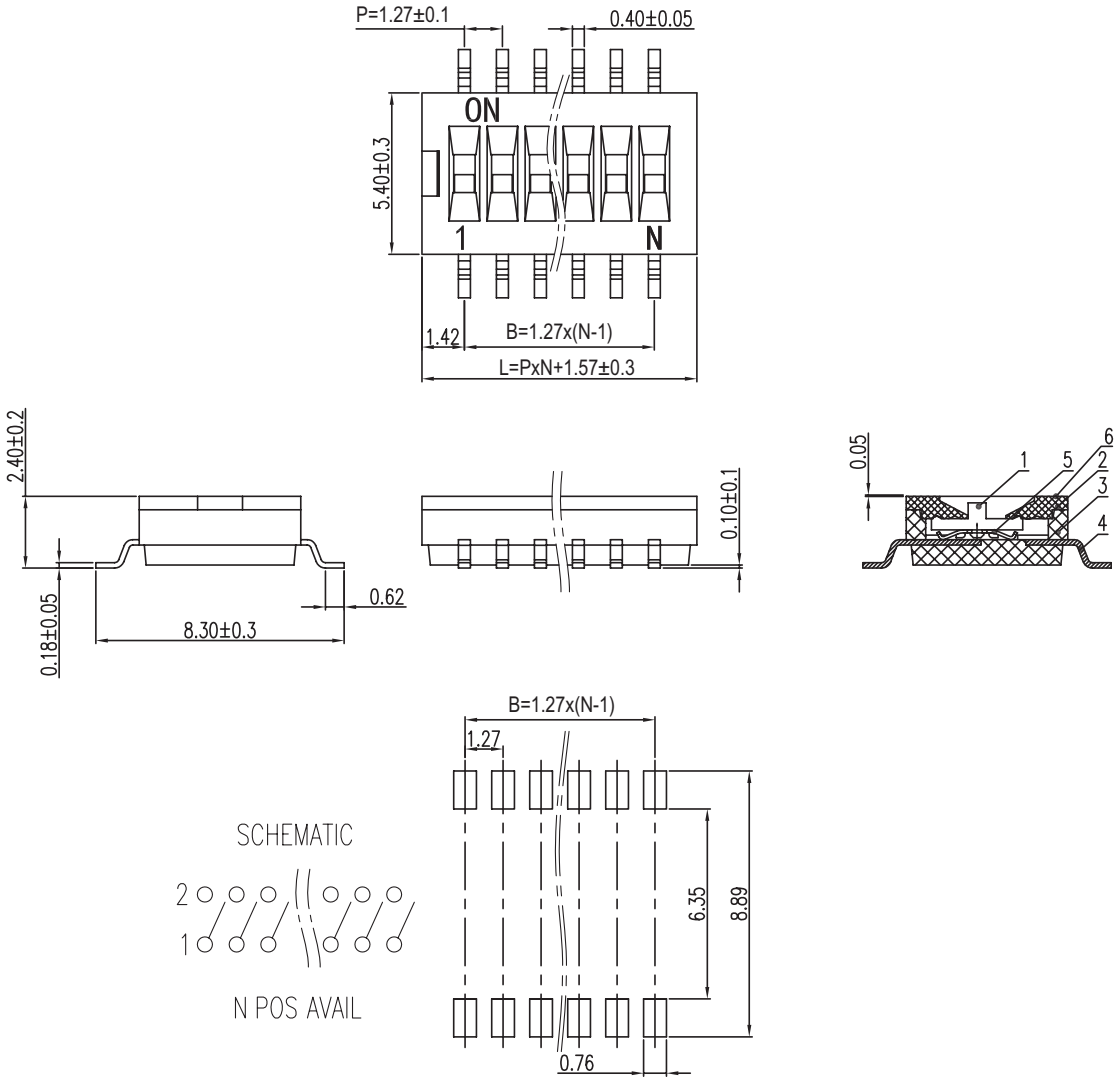


Recommended PCB Layout
Top View

This series is constructed of single piece modules where L is the total length, P is the pitch, and N is the number of poles.						
N	02	03	04	06	08	10
L	4.11	5.38	6.65	9.19	11.73	14.27
B	1.27	2.54	3.81	6.35	8.89	11.43

SOLDERABILITY

parameter	conditions/description	min	typ	max	units
hand soldering[1]	for maximum 3 seconds	315	320	325	°C
reflow soldering[1]	240~260 °C (20 seconds max)			260	°C


Notes: 1. Keep in "off" position during soldering.

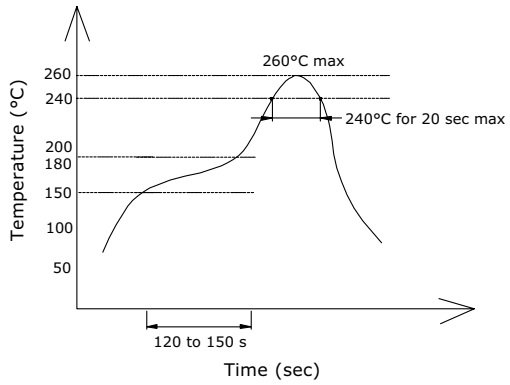

PACKAGING (TAPE & REEL)

units: mm

Reel Size: Ø330 mm

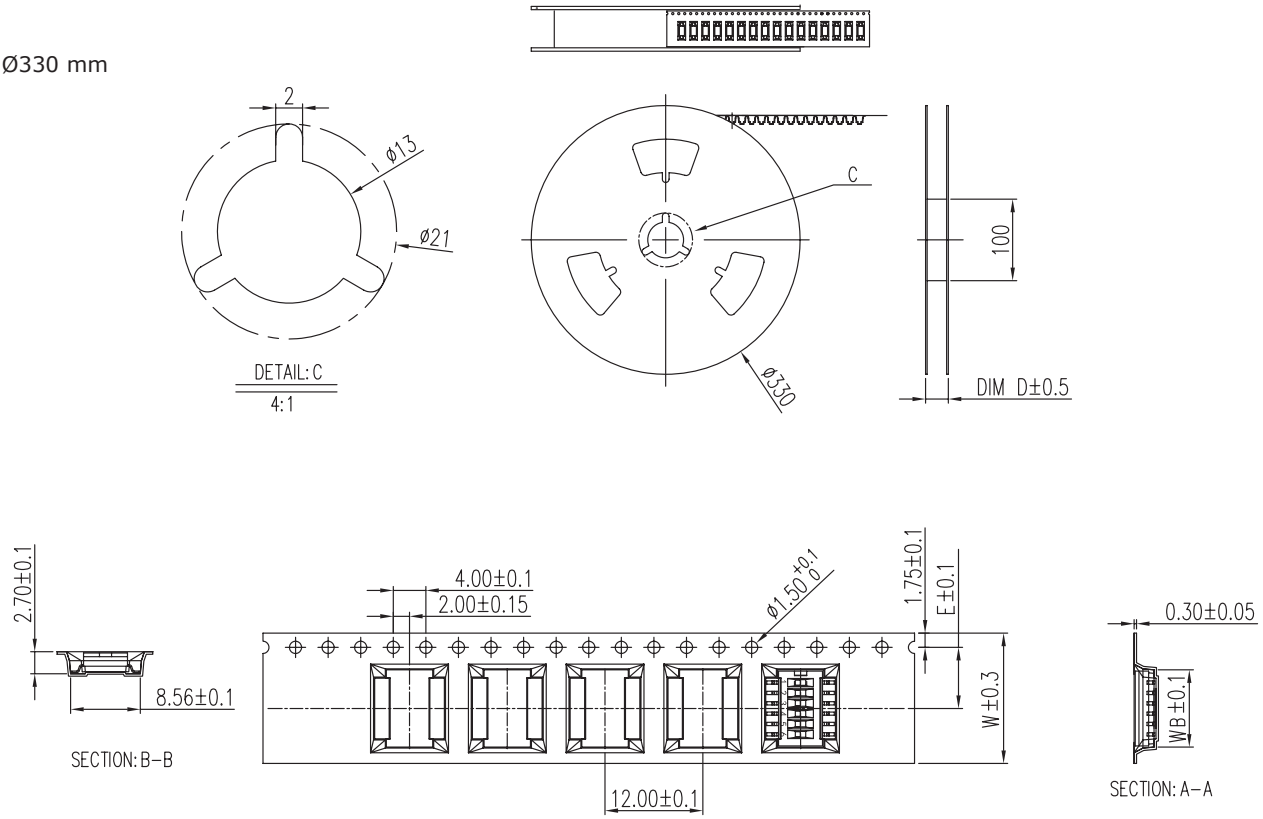

Tape Dimensions					
#Poles	W (mm)	WB (mm)	E (mm)	D (mm)	QTY
2	16.00	4.41	7.50	20.4	2,000
3	16.00	5.68	7.50	20.4	2,000
4	16.00	6.95	7.50	20.4	2,000
6	16.00	9.49	7.50	20.4	2,000
8	24.00	11.88	11.50	28.4	2,000
10	24.00	14.42	11.50	28.4	2,000

REVISION HISTORY

rev.	description	date
1.0	initial release	11/26/2019

The revision history provided is for informational purposes only and is believed to be accurate.

CUI DEVICES

CUI Devices offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI Devices reserves the right to make changes to the product at any time without notice. Information provided by CUI Devices is believed to be accurate and reliable. However, no responsibility is assumed by CUI Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI Devices products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

cuidevices.com

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Same Sky:

CBT-09427-SMT-TR CDM1222-12A-FW-F16-050-67 CFM-2507CF-0140-313 CMA-4544PF-W SJ1-3535N CMP-5247TF-K PJ-047BH PR4-5V-450-1A SJ-2523-SMT-TR CMI-9653S-SMT-TR CPT-1117-83-SMT-TR PJ-067B TBP02P1-381-10BE SJ-43516-SMT-TR-PI TB007-508-02BE CMC-5042PF-AC HSE-B20350-NP PJ-058AH PJ-202AH UJ32-C-H-G-L1-MSMT-TR CFM-2510B-0130-275 CFM-A238BF-270-651 CMM-2718AT-42316-TR CPM-2H CFM-6015V-239-292-20 DS01C-254-S-03BE TBP01R1-508-14BE CPI-1375IC-80T DS04-254-2-02BK-SMT TBL004V-508-02BE-2GY