

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2015
© COPYRIGHT 2015 BY - TE CONNECTIVITY ALL RIGHTS RESERVED.


LOC	DIST
-	-

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	REVISED PER ECO-15-001798	19MAR2015	VNB	DM
	A1	REVISED PER PCN E-20-000705	28JAN2020	PK	DM
	B	REVISED PER PN-24-219560	30AUG2024	CO	CB
	C	REVISED PER PCN-25-233530	10DEC2024	RK	CB

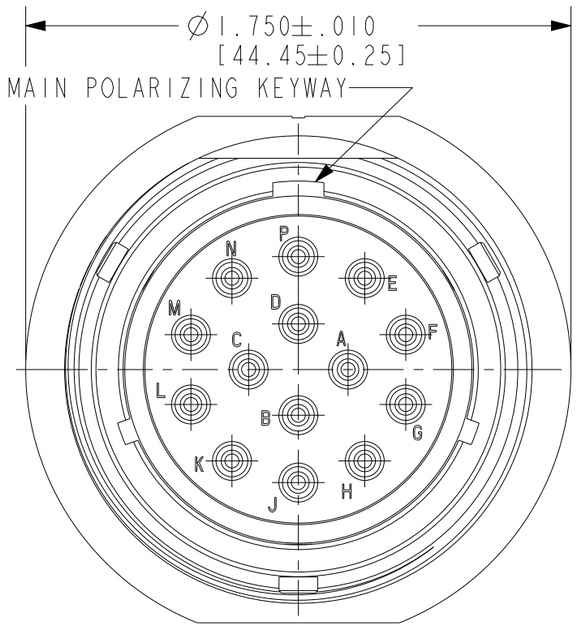

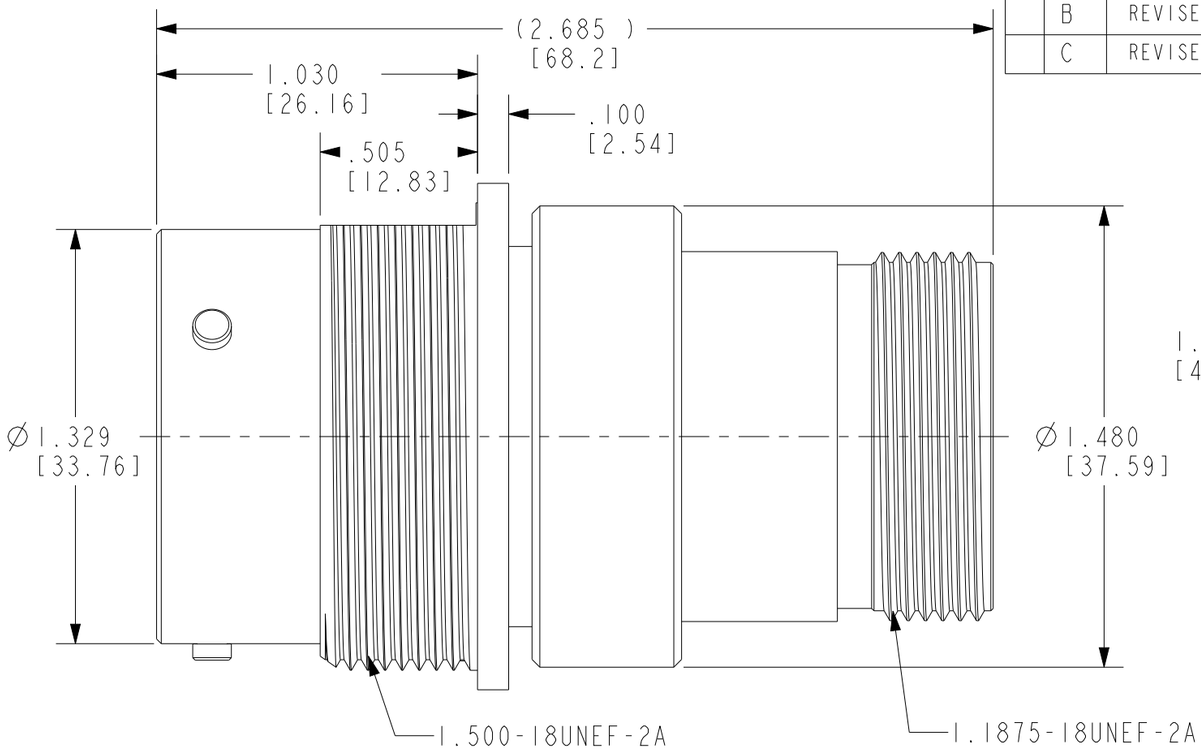

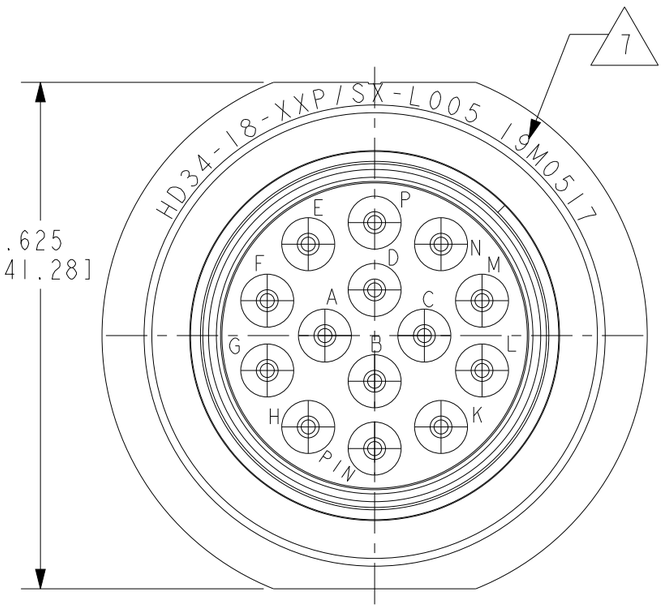

7 DATE CODE: IDENTIFIES THE YEAR,MONTH,DAY AND HOUR OF ASSEMBLY.
YEAR: FIRST AND SECOND DIGITS. (14=2014)
MONTH: THIRD DIGIT,EXCLUDING I.A=JAN.,B=FEB.,C=MARCH...(K=OCT.)
DAY: FOURTH AND FIFTH DIGITS (14=14th DAY)
HOUR: SIXTH AND SEVENTH DIGITS (11=11AM)

6 MATERIAL:
RECEPTACLE HOUSING: 6061-T6 ALUMINIUM ALLOY,
RETAINER RING: PA66 GF10,
GROMMET: SILICONE VMQ (RED).

5. RECOMMENDED PANEL THICKNESS: .062[1.58] TO .1875[4.76].


4. FOR ARRANGEMENT OF CONTACT LOCATION SEE ENVELOPE DWG 0425-013-1800.

3. THIS CONNECTOR MATES WITH PART NO. HD36-18-XXS/PX-XXXX.
XX= NUMBER OF CAVITIES, X= TYPE OF SEAL,
XXXX= ALL MODIFICATION.


2. 14 PIN ARRANGEMENT SHOWN FOR REF. ONLY.

1. CONSULT FACTORY FOR ELECTRICAL AND MATERIAL SPECIFICATIONS.

NOTES:

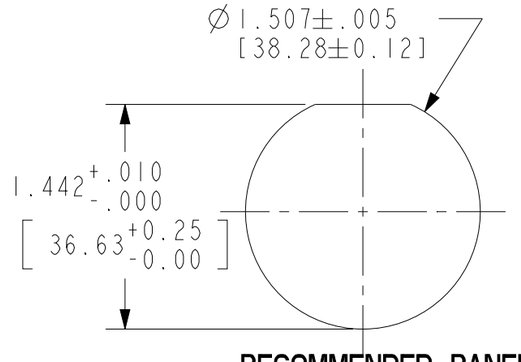

RECOMMENDED PANEL MOUNTING HOLE

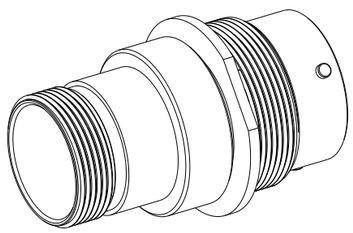

3D VIEW

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES[mm]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±.010 [±.254]
4 PLC ±-
ANGLES ±0°30'0"

MATERIAL 6

FINISH -

DWN	04FEB2008 I.GRANTCHAROVA
CHK	18MAR2008 R. MCCORD
APVD	26FEB2008 S. BEARD
PRODUCT SPEC	108-151014
APPLICATION SPEC	114-151014
WEIGHT	74g

TE Connectivity

NAME: RECEPTACLE CONNECTOR SIZE 18 BAYONET COUPLING -L005 MOD

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	-	C-HD34-18-XXP/SX-L005	-

Customer Drawing | SCALE NONE | SHEET 1 OF 1 | REV C