REV	
A	DTM06-3S

REVISIONS			
SYM	DESCRIPTION	DATE	APPROVED
NC	NEW RELEASE PER E.O. A14874	7-21-95	RDR
A	REDRAWN & REVISED PER E.O. P17172	3-6-01	RDR

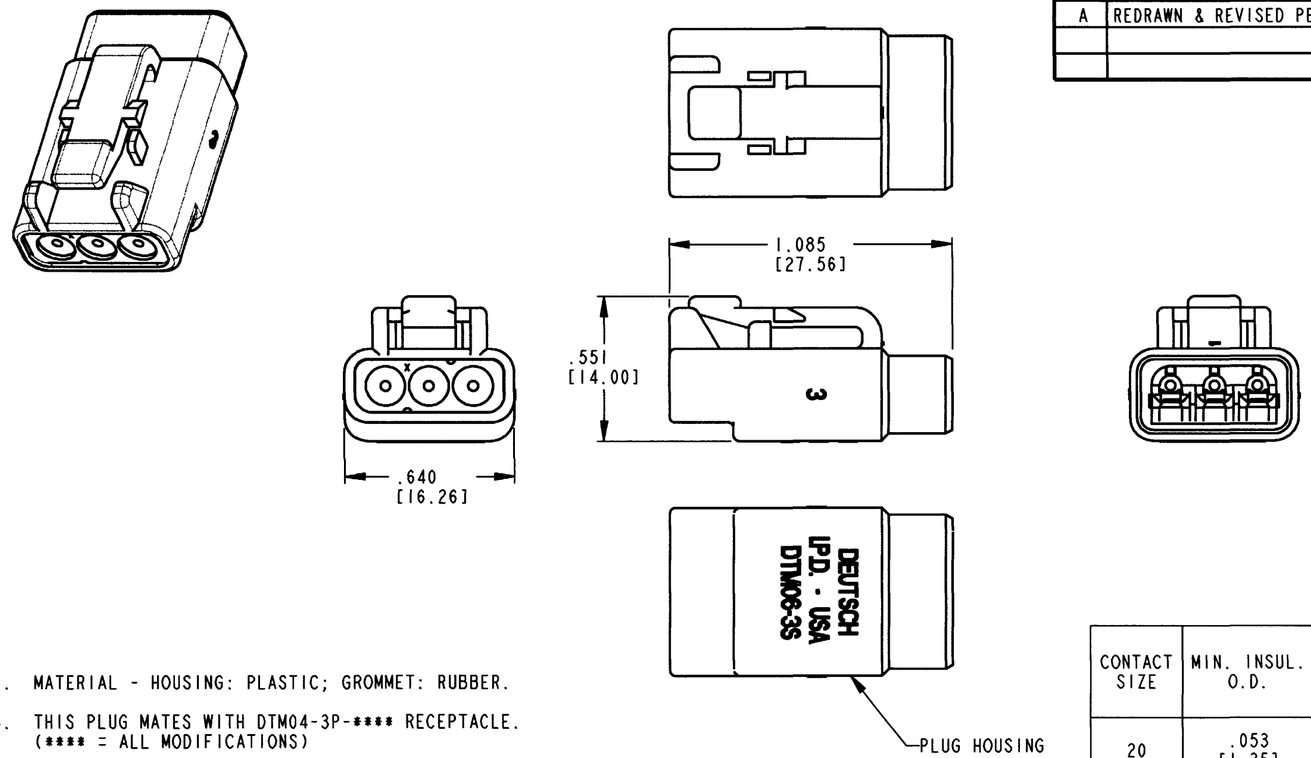

CONTACT SIZE	MIN. INSUL. O.D.	MAX. INSUL. O.D.	WIRE RANGE 4 [mm²] REF ONLY
20	.053 [1.35]	.120 [3.05]	16-20 AWG [1.0-0.5]

6. MATERIAL - HOUSING: PLASTIC; GROMMET: RUBBER.
5. THIS PLUG MATES WITH DTM04-3P-**** RECEPTACLE. (**** = ALL MODIFICATIONS)
4. FOR CONTACT AND WIRE PERFORMANCE AND APPLICATION CHARACTERISTICS SEE ENVELOPE DRAWING 0425-015-0000.
3. SECONDARY WEDGE LOCK SOLD SEPARATELY: WM-3S.
2. DIMENSION TOLERANCE: ±.025 [.64].
1. DIMENSIONS ARE IN INCHES [mm].

NOTES: UNLESS OTHERWISE SPECIFIED

	SIGNATURE & DATE
DR	J. APOSTOL 05MAR2001
CHK	L. Pallutz 3/6/01
PE	D. Meyer 3/6/01
APPD	R. Rad 3-6-01
SCALE NONE	WT

PLUG
3 SKT. CONT. #20
DTM SERIES

ENVELOPE

CP | MATL. CODE

The Deutsch Company
DEUTSCH I.P.D.
3850 INDUSTRIAL AVE.
HEMET, CALIF. 92545

B | DTM06-3S
DWG SIZE | CODE 11139 | SHEET 1 OF 1