
REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
A		3-18-83	RWA Rev.

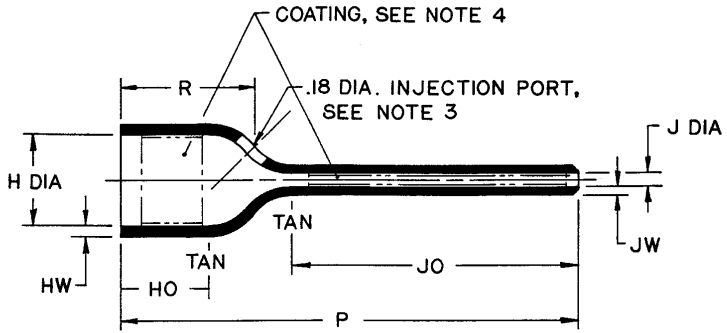

NOTES:

1. All dimensions are in inches (millimeters).
2. Dimensions appearing in table are as follows:
   a. As supplied
   b. After unrestricted recovery
3. When (-00) modification no. is specified, part shall have injection port located as shown and shall be supplied with plug 002A011 of same material.
4. When slash no. is specified, parts shall be coated as shown.

PART NO.	H Min a	H Max b	J Min -25 & -3 & -4 a	J Min -12 a	J Max b	P ±10% b	R ±15% b	HO ±10% b	JO ±10% b	HW ±20% b	JW ±20% b
202A921	.76 (19,3)	.51 (13,0)	.25 (6,3)	.18 (4,5)	.08 (2,1)	2.38 (60,5)	.70 (17,8)	.46 (11,7)	1.49 (37,8)	.06 (1,52)	.045 (1,14)

ORDERING INFORMATION:

202A921 -3 -00 /42

Base part number

Material dash number

-3 Polyolefin, semi-rigid (RT-301)
-4 Polyolefin, flexible (RT-1304)
-12 Viton, flexible (RT-1312)
-25 Elastomer, fluid resistant (RT-1325)

Modification number

-00 Injection port

Slash number

/42 S1017 Adhesive (For -3 & -4 material only)

SPECIFICATION CONTROL DRAWING

THIS DRAWING AND THE INFORMATION SET FORTH HEREON ARE THE PROPERTY OF RAYCHEM CORPORATION, AND ARE TO BE HELD IN TRUST AND CONFIDENCE. PUBLICATION, DUPLICATION, DISCLOSURE, OR USE FOR ANY PURPOSE NOT EXPRESSLY AUTHORIZED IN WRITING BY RAYCHEM CORPORATION IS PROHIBITED.

DO NOT SCALE THIS DRAWING

DRAWN	K. Tanaka 12-29-77	
CHECKED	S. Grove 12-29-77	
DSGN APPD	RNC 1/5/78	
MFG APPD	Ted 1/5/78	
QC APPD	S. Joyner 1/5/78	
MKTG APPD	B. Kaufman 1/9/78	

Raychem

RAYCHEM CORPORATION
300 CONSTITUTION DRIVE
MENLO PARK, CALIFORNIA 94025

TITLE: BOOT, STRAIGHT

CODE IDENT. NO. 06090

PART NO. 202A921

SHEET 1 OF 1

If this document is printed it becomes uncontrolled.
Check for the latest revision.