

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2016
© COPYRIGHT 2002 BY TE CONNECTIVITY ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	REVISED PER PCN-24-210155	22APR2024	PS	CB
	C1	REVISED PER PCN-25-243104	30APR2025	AJ	MB
	D	REVISED PER PCN-25-236481	19JUN2025	AJ	MB

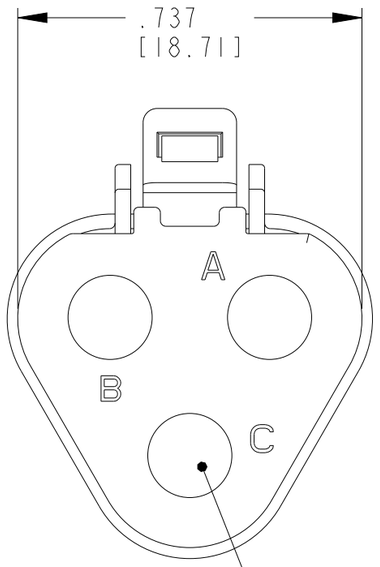


GROMMET

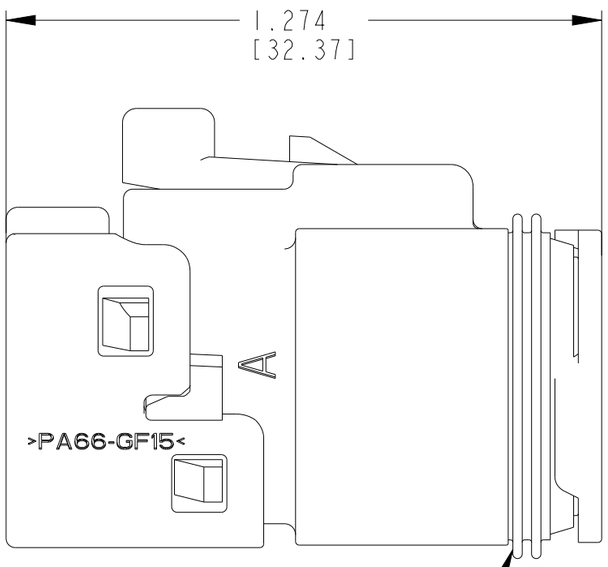


HOUSING


FRONT SEAL

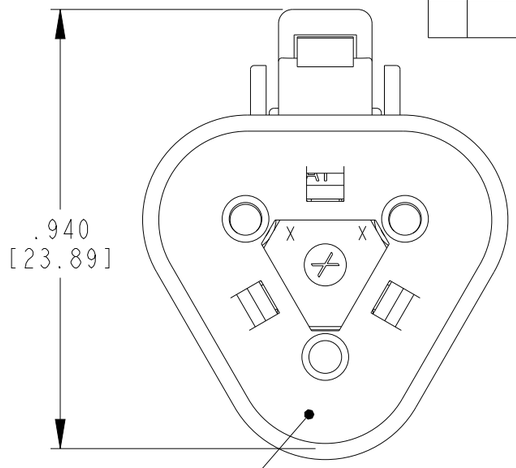

WEDGE LOCK

SNAP CAP

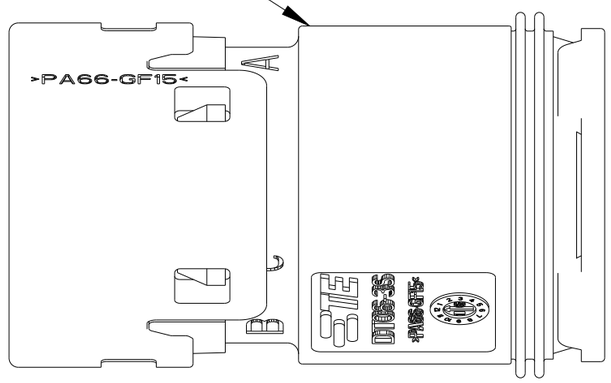

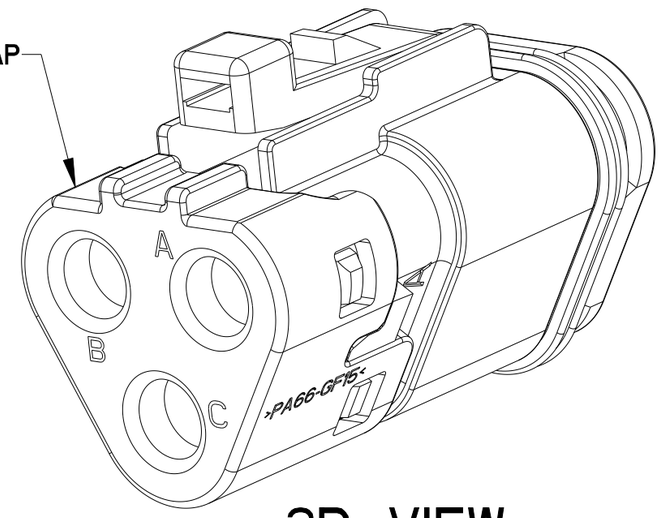

3D VIEW

4 RESISTOR CHARACTERISTICS: 120 OHMS±10 PERCENT, .4 WATTS MINIMUM INSERTED INTO THE CAVITIES A AND B.

3 THIS CONNECTOR CAN PASS THRU A ONE INCH [25.44] HOLE.

2 MATERIAL: HOUSING/CAP: PA66 GF15 (BLACK)
GROMMET: VMQ (RED-ORANGE)
FRONT SEAL: VMQ (RED-ORANGE)
WEDGE LOCK: PBT GF30 (BLUE)
SOCKET TERMINAL: COPPER ALLOY; GOLD PLATED

1 THIS PLUG MATES WITH THE DT04-3P-XXXX RECEPTACLE. (XXXX = J1939 MODIFICATIONS.)
CONSULT FACTORY FOR MODIFICATIONS.
SECONDARY WEDGE LOCK W3S-1939-P012 IS KEYED AND INCLUDED TO PREVENT MISMATING AND MAY MATE WITH ALL 3 WAY DT SERIES RECEPTACLES.

NOTES:

TE INTERNAL PN	DEUTSCH PN	PN REV
DT06-3S-EP10	DT06-3S-EP10	D

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: in [mm]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±.025 [0.64]
4 PLC ±
ANGLES ±1°

MATERIAL 2

FINISH

DWN X.SANCHEZ 11NOV2002
CHK A.ROLINSKI 21NOV2002
APVD S.BEARD 02DEC2002
PRODUCT SPEC 108-151009
APPLICATION SPEC 114-151009
WEIGHT 9.00g

TE Connectivity

NAME 3 WAY PLUG, D.T. SERIES (TERMINATING PLUG) -EP10 MOD

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	4AFU8	C-DT06-3S-EP10	-

CUSTOMER DRAWING | SCALE 3:1 | SHEET 1 OF 1 | REV D

1470-19 (3/13)