


REVISIONS			
REV	DESCRIPTION	DATE	APPV
A	PRODUCTION RELEASE	JHAGER 5/25/22	DV 5/31/22

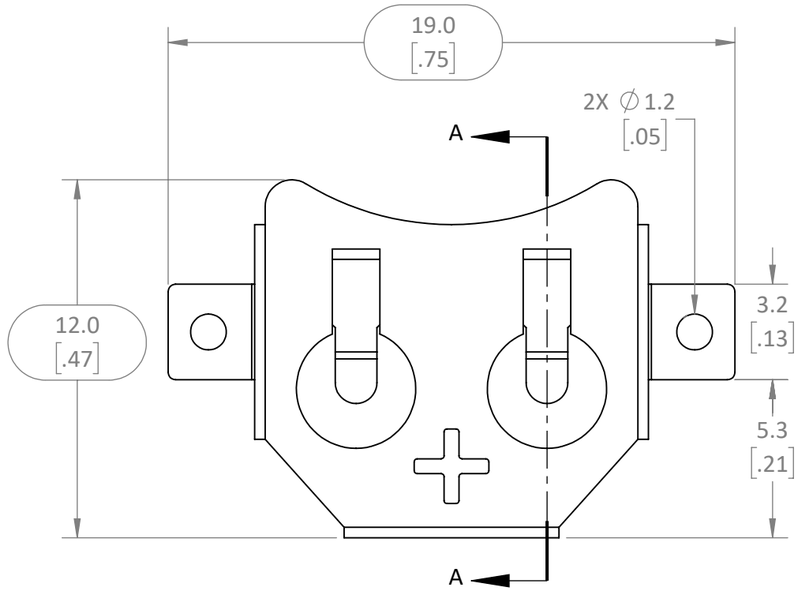


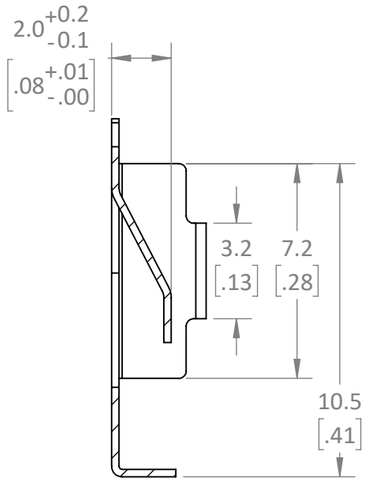


SECTION A-A

NOTES: (UNLESS OTHERWISE SPECIFIED)
1. ALL DIMENSIONS ARE IN MILLIMETERS [IN].
2. DIMENSIONS APPLY AFTER FINISHING.
3. MANUFACTURE TO BE COMPLIANT WITH EU RoHS DIRECTIVE, USE MATERIALS THAT DO NOT CONTAIN REACH SUBSTANCES OF VERY HIGH CONCERN >1000ppm, AND USE DRC CONFLICT-FREE SOURCED MATERIALS.
4. PRODUCT QUALIFIED IAW LINX TEST PLAN AT CURRENT REVISION.
5. UNLISTED DIMENSIONS ARE CONTROLLED BY SOLID MODEL AT LATEST REVISION.
6. FINISH BRIGHT NICKEL PLATED FREE OF CONTAMINANTS
7. PACKAGE MATERIAL IN REEL IAW ASTM EIA-481F
    1. PITCH: 16mm
    2. TAPE SIZE: 32MM
    3. EMBOSSED CARRIER
8. PACKAGE AND LABEL LOT BAG, REEL, TRAY OR BOX IAW SUPPLIED LABEL DRAWING ONLY.

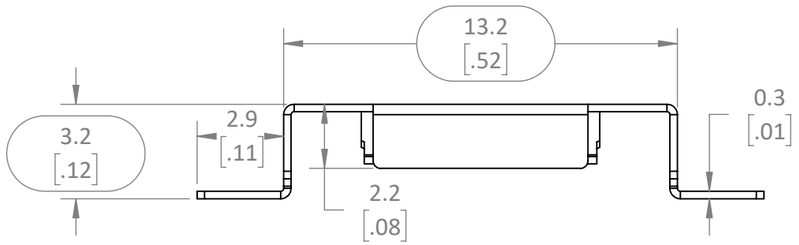

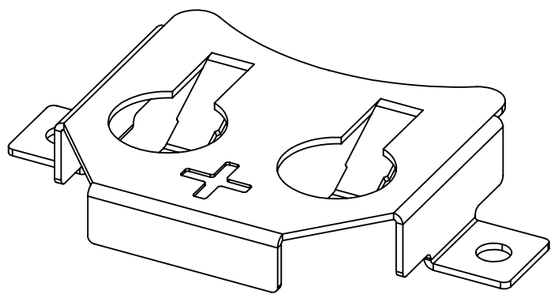

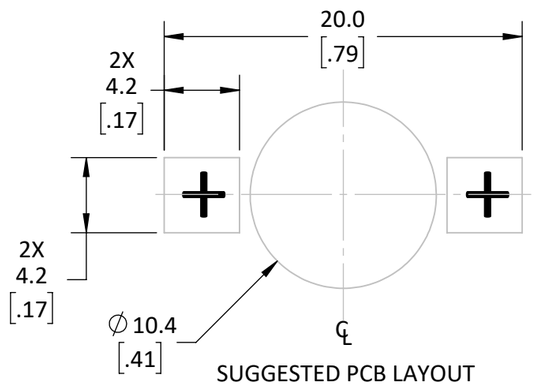

SUGGESTED PCB LAYOUT
TOP VIEW
SCALE 3:1

WARNING: THIS DRAWING CONTAINS PROPRIETARY INFORMATION THAT IS THE SOLE PROPERTY OF LINX TECHNOLOGIES, AND SHALL BE TREATED AS SUCH. NO DISCLOSURE OR REPRODUCTION OF THIS DOCUMENT IS PERMITTED, IN WHOLE OR IN PART, WITHOUT THE EXPRESS WRITTEN PERMISSION OF LINX TECHNOLOGIES OR ITS DESIGNATED AGENTS.

MATERIAL: CuSnP	INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5.	PROJECTION:
WEIGHT:	.X ± 2.0 .XX ±1.00 .XXX ±.500 ANGLES: ±1° SURFACE: 32	
FINISH: Ni	DRAWN: JHAGER DT: 5/24/22	
	ENGR: DASARATHAN DT: 5/24/22	

159 ORT LANE
MERLIN, OR 97532

TITLE:
BATTERY HOLDER CR1220 CELL SURFACE MOUNT

SIZE	DWG. NO.	REV
B	C-BAT-HLD-007-SMT-TR	A

SCALE: 5:1	DO NOT SCALE DRAWING	SHEET 1 OF 1

LDCFDFB_B