



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LENI2B0048	2012/11/09	Sam	Modify PCB Layout
D	LENI530155	2015/03/10	Jinhai	Change Logo
E	CI90273	2019/02/25	Ruru	Modify Note

ALTW
CONFIDENTIAL
2019-02-25
R&D DEPT.

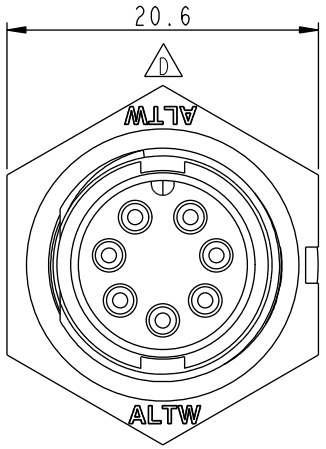


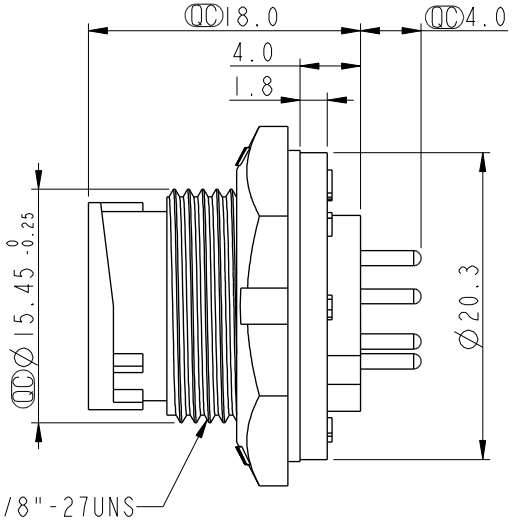

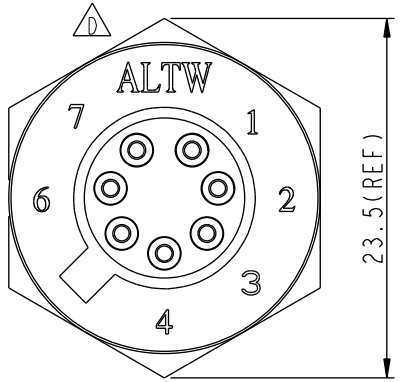





7 Pin Male Connector
Male Pin PCB Layout

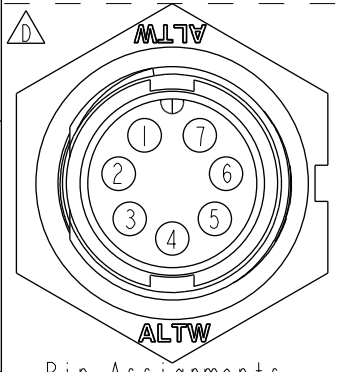

Pin Assignments
Front View



Recommended Panel Cut-out

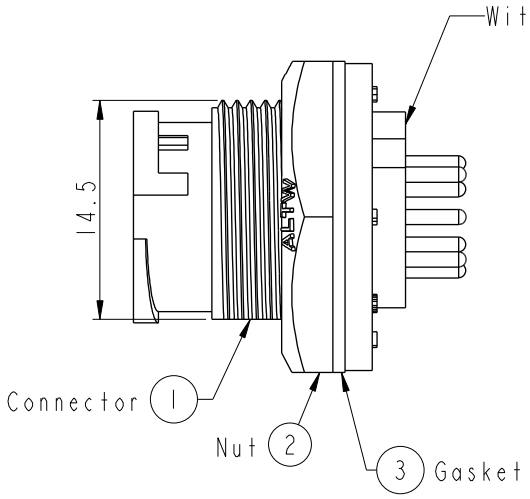

Note: E
* QC Important Dimension To Check.
* Waterproof Rate: IP67, Unmated
* Housing: Thermoplastic, Black
* Pin: Copper Alloy, Gold Plated
* Nut: Thermoplastic, Black
* Gasket: Rubber, Black
B * Use With Waterproof Cap Or Dust Cap
Panel Thickness Max: 3.0mm
B * Use Without Waterproof Cap Or Dust Cap
Panel Thickness Max: 4.5mm
* Gasket and Nut are packed separately in PE bags.

UNIT: mm

TOLERANCE
.X ±0.25
.XX ±0.1
.XXX ±0.05
ANGLES ±1°

TITLE: Standard
Panel Lock 7Pin M Conn M Pin

SCALE 2:1 | SIZE A4 | SHEET 1 OF 1
REV. E | WC-REV. B.2 | QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO: BD-07PMMP-LC7001	DRAWN BY: Ruru	DATE: 2019-02-25
DWG NO: BD-07PMMP-LC7001	CHECKED BY: Rita	DATE: 2019-02-25
CUSTOMER: ALTW	APPROVED BY: Max	DATE: 2019-02-25

W10814-03-RW01A2

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

AMPHENOL LTW:

DT-HCM-G3BMM-RLA60 FLKD-07EGFS-GCP-001 AD-03BMMA-LL7001 DC-05BMFB-QL8APP LAD-05BFFM-QR8D01 M12A-04PFFS-SF8002 M12A-17BMMM-PL8D04 PWC-03BFFA-LL7002 8-04PMMS-SH7002 ASU-08PMMS-QC8A15 CC-03BFMB-QL8APP M12A-03PMMS-SF8001 PWCU-04RMFS-LC7002 PWM-02BFMB-TL7001 8-03PMMS-SH7002 M12A04FL-12AFR-SDA05 MSAP-12BMMA-SL7001 MSBP05MR-SBPMR-SB001 BD-03BFFA-QL8MP0 ACC-03AFFM-LL7A01 DT-HCM-G3BFF-RLA60 FLBB-04FGMS-GCP-207 M12A04FR-12AFR-SD001 Q8DU-05PMMS-QF8001 BSU-10PMMS-SC7001 MSBS-05PFFR-SF7003 RCP5SM-SPG06M-TL7B01 RCP5UM-UPG06M-TL7A01 DC-05BMMA-QL8MPP DD-18BMFA-LL7001